

CARLISLE

branded tires are now

CARLSTAR



AGRI- CULTURE

TIRE CATALOG

 **TTAN**



AGRICULTURE

Agricultural tires used to be manufactured under the name Carlisle has been workhorses of American industry for decades. Applications for tractors, trailers and various implements. From 2023 they are getting a new brand name after their original manufacturing company: CARLSTAR

TREAD VIEW QUICK REFERENCE GUIDE



FS FR-G STEEL

A perfect choice for low soil compaction. Has a higher flotation value and higher load rating due to the steel belt.

FARM SPECIALIST IMPLEMENT

Hay Rake

The Farm Specialist Implement tires are especially designed for heavy duty conditions resulting in longer life. The improved self-cleaning is achieved by specifically designed breakers in the tread pattern. Additionally, we designed inner liners and compound for high plunger resistance.



Item Number	Size	Star /PR	TL/TT	LI/SI	Load Capacity (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Rec. Rim (inch)	O.D. (mm)	S.W. (mm)	SLR (mm)	RC (mm)	Weight (kg)	Tread Depth (mm)	CoO	EAN
6A03361	15x6.00-6 (155/70-6)	6	TT	70 A6	335	30	3.3	4.5	361	157	160	1062	2.5	2.4	CN	5999110800318
6A02351	16x6.50-8 (165/60-8)	6	TT	64 A6	280	30	3	5.38	406	163	178	1219	3	2.1	CN	5999110800356
6A02361	16x6.50-8 (165/60-8)	10	TT	85 A6	515	30	5.1	5.38	406	163	178	1219	3	2	CN	5999110800349
6A03371	18x8.50-8 (215/60-8)	6	TT	82 A6	475	30	2.35	7	451	213	201	1344	3.9	2.4	CN	5999110800417

FARM SPECIALIST F-1

Hay Rake Applications

Used for highway service implement applications, the Farm Specialist F-1 tire is specially designed for towed vehicle applications at intermittent highway speeds. DOT approved for highway use. Made in the USA.




Item Number	Size	Star /PR	TT/ TL	LI/SI (HLV)	Load Capacity (kg)	Speed (km/h)	Inflation Pressure (bar)	Rec. Rim (inch)	O.D. (mm)	S.W. (mm)	SLR (mm)	RC (mm)	Weight (kg)	Tread Depth (mm)	CoO	EAN
51H360	9.5L-15		TL	120J	1400	100	5.2	7	767	241	340	2276	19.7	9.5	US	5999110825557
51H392	11L-15	12 (LRF)	TL	128J	1800	100	6.2	8	777	279	345	2304	24.3	9.9	US	5999110803203
6A0562	12.5L-15		TL	134G	2120	90	6.2	10	826	328	377	2515	32.6	9.5	US	5999110803210

FARM SPECIALIST F-2

Front Tractor, Field Equipment

The Farm Specialist F-2 tire is a proven tire for front steering 2-wheel drive tractor applications. Its 3 rib design is optimal for steering response in loose and cultivated soils and has added stability with its wide center and shoulder ribs. Made in the USA.

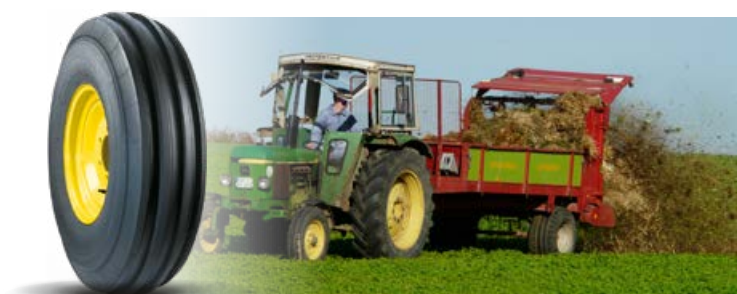

Item Number	Size	Star /PR	TT/ TL	LI/SI (HLV)	Load Capacity (kg)	Speed (km/h)	Inflation Pressure (bar)	Rec. Rim (inch)	O.D. (mm)	S.W. (mm)	SLR (mm)	RC (mm)	Weight (kg)	Tread Depth (mm)	CoO	EAN
52F230	4.00-15	4	TT	62A8	265	40	3.6	3	617	112	274	1836	4.2	11.3	US	5999110825748
52F290	7.5L-15 (210/85-15)	6	TT	93A8	650	40	3	6	739	203	333	2212	12.4	19	US	5999110825168
52F318	11L-15	8	TL	106A8	950	40	3	8	813	279	366	2441	24.3	19.7	US	5999110836584

FARM SPECIALIST F-3, RF-3

Front Tractor, Wagons, Balers, Spreaders, Seeders & Feed Yard Mixers

F-3: Primarily used on front tractor steering applications, the Farm Specialist F-3 tire offers a rugged and heavier tread construction for resistance to chipping, cracking and rib tearing. Its tightly grooved zig-zag tread is designed for turf protection and engineered to channel water in wet terrain. Made in the USA.

RF-3*: With its radial construction and IF technology design, this tire is built to carry up to 20% more load at the same pressure of a standard radial implement. Steel belted radial construction for improved puncture resistance. Zig-zag grooved tread pattern used to channel water in wet terrain.



Item Number	Size	Star /PR	TL/ TT	LI/SI (HLV)	Load Capacity (kg)	Speed (km/h)	Inflation Pressure (bar)	Rec. Rim (inch)	O.D. (mm)	S.W. (mm)	SLR (mm)	RC (mm)	Weight (kg)	Tread Depth (mm)	CoO	EAN
565315	11L-16	10	TL	112A8	1120	40	3.6	8	838	279	373	2487	25	12.7	US	5999110803302
6A09271*	280/70R15		TL	134D	2120	65	4.4	8	774	269	345	2311	24.3	9.5	CN	5999110836317

FARM SPECIALIST HF-1

Wagons, Balers, Spreaders, Seeders & Feed Yard Mixers

The Farm Specialist HF-1 implement tire is designed for higher performance applications with heavier loads and when high flotation is needed. Tough compound used for higher performance on wagons, tankers, seeders, balers and other flotation devices. Made in the USA.



Item Number	Size	Star /PR	TL/ TT	LI/SI (HLV)	Load Capacity (kg)	Speed (km/h)	Inflation Pressure (bar)	Rec. Rim (inch)	O.D. (mm)	S.W. (mm)	SLR (mm)	RC (mm)	Weight (kg)	Tread Depth (mm)	CoO	EAN
6A0970	31x13.50-15	10	TL	120B	1400	50	4.1	10	785	351	363	2413	9.5	27.2	CN	5999110836362

FARM SPECIALIST R-1

Compact Utility Tractors

Used primarily on compact utility tractors, the Farm Specialist R-1 tire features an overlapping center tread lug that performs in both wet and dry conditions. The all-purpose tire features a unique multi-angle long bar tread for aggressive performance, excellent traction and lateral stability. Made in the USA.



Item Number	Size	Star /PR	TL/ TT	LI/SI (HLV)	Load Capacity (kg)	Speed (km/h)	Inflation Pressure (bar)	Rec. Rim (inch)	O.D. (mm)	S.W. (mm)	SLR (mm)	RC (mm)	Weight (kg)	Tread Depth (mm)	CoO	EAN
570000	7-14 (170/100-14)	6	TL	80A8	450	40	2.5	6	688	188	314	2044	12.1	25.4	US	5999110803630
6E0002	215/90-16	6	TL	91A8	615	40	1.9	6	798	213	353	2350	17.9	25.4	US	5999110800424
570004	8.3-24	6	TL	97A8	730	40	2.35	7	993	211	460	2976	36.9	30.2	US	5999110803654
570005	9.5-24	6	TL	102A8	850	40	2.1	8	1048	241	483	3130	34.9	32.8	US	5999110803661

FARM SPECIALIST I-1

Wagons, Balers, Spreaders, Seeders & Feed Yard Mixers

Multi rib farm tire designed for flotation for use on farm implements, wagons, tanks, carts and other pull behind vehicles.



Item Number	Size	Star /PR	TL/ TT	LI/SI (HLV)	Load Capacity (kg)	Speed (km/h)	Inflation Pressure (bar)	Rec. Rim (inch)	O.D. (mm)	S.W. (mm)	SLR (mm)	RC (mm)	Weight (kg)	Tread Depth (mm)	CoO	EAN
518277	4-12	4	TT	67B	307	50	3	3	518	127	231	1537	3.2	4.4	US	5999110825694
51F235	5.00-15	4	TT	79B	431	50	2.5	4	640	137	285	1897	5.4	4.9	US	5999110825830
510363	26x12.00-12	10	TL	120B	1411	50	3.6	10.5	648	297	290	1923	13.1	9.9	US	5999110825793
51F252	5.90-15	4	TT	85B	515	50	2.5	4.5	668	160	297	1979	6.1	5.2	US	5999110803494
51F388	6.70-15	6	TL	97B	730	50	3	4.5	716	183	318	2126	8.7	6.9	US	5999110825823
51F337	7.60-15	8	TL	106B	950	50	3.6	5.5	729	201	325	2159	12.7	6.7	US	5999110803517
51F3371	7.60-15	8	TL	106B	950	50	3.6	5.5	729	200	325	2159	12.7	6.7	CN	5999110803531
51F391	11L-14	8	TL	112B	1120	50	2.5	8	752	269	335	2228	14.7	8.9	US	5999110825533
51F3441	9.5L-15	8	TL	112B	1120	50	3	7	760	229	335	2238	12.3	7.1	CN	5999110803579
51F3181	11L-15	8	TL	113B	1150	50	2.5	8	777	277	343	2286	14.6	7.1	CN	5999110803388
51F385	10.00-15	8	TL	121B	1450	50	2.75	8	853	290	381	2504	20.7	7.1	US	5999110825762
6A0340	14-16.1	14	TL	138B	2360	50	3.6	11	943	359	414	2756	35.2	10.3	US	5999110836591
51F350	16.5L-16.1	10	TL	138B	2360	50	2.5	14	1036	434	455	2985	45.8	11.4	US	5999110803227
510130	18-16.1	10	TL	130B	1900	50	2.2	14	826	432	363	2418	32.6	11.4	US	5999110825991
510135	21.5L-16.1	10	TL	146B	3000	50	1.9	18	1130	546	503	3354	51.5	12.7	US	5999110803432

RADIAL I-1 IMPLEMENT

For Implements & Baler Applications

The new Carlisle IF radial implement tires are designed to carry 20% higher loads at the same pressure as standard metric tires. These steel belted tires will provide improved tread wear and lower soil compaction due to a larger footprint.



Item Number	Size	Star /PR	TL/ TT	LI/SI (HLV)	Load Capacity (kg)	Speed (km/h)	Inflation Pressure (bar)	Rec. Rim (inch)	O.D. (mm)	S.W. (mm)	SLR (mm)	RC (mm)	Weight (kg)	Tread Depth (mm)	CoO	EAN
6A15771	240/80R15		TL	121D	1450	65	3.2	8	765	246	338	2235	22.7	8.7	CN	5999110835426
6A15761	280/70R15		TL	134D	2120	65	4.4	8	775	269	340	2261	24.9	8.7	CN	5999110835457

FARM SPECIALIST TB

Tractors, General Application

Farm Specialist Tractor Bias tire is a multi-angled, curved lug bars traction tire with good self-cleaning and rider comfort and a rated Speed of 30 km/h. Strong and sturdy body plies for durability, cut and crack-resistant tread compound for longer service life.



Rim Ø (inch)	Product Code	Size	PR	LI/SI	Overall Diameter (mm)	Section Width (mm)	Rim Width (inch)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Max Load (kg)	Inflation Pressure (bar)	Weight (kg)	Tread Depth (mm)	CoO	EAN
16	6X17393*	7-16	8	96A6/92A8	742	183	6	335	2190	600	2.9	12	22.5	IND	5999110837079
16	6X17403*	8-16	8	101A6/97A8	790	211	6	356	2331	690	2.3	17	22	IND	5999110837086
16	6X17413*	9.5-16	8	100A6/98A8	845	241	8 - W8L	389	2502	800	2.5	20	28	IND	5999110837093
20	6X23053	11.2-20	8	111A6/107A8	1020	292	W10	470	2995	1090	2.0	30	32	IND	5999110840321
24	6X18523	8.3-24	8	112A6/108A8	995	211	W7	469	2925	925	3.1	25.7	28.5	IND	5999110838557
24	6X18173	9.5-24	8	112A6/108A8	1056	232	W8-W7	495	3105	1120	2.8	26	28.5	IND	5999110837109
24	6X18313	11.2-24	8	116A6/112A8	1105	284	W10	515	3249	1250	2.4	33	32	IND	5999110836324
24	6X18193	12.4-24	8	121A6/117A8	1160	315	W11-W9, W10	539	3410	1450	2.3	41	34	IND	5999110837116
24	6X18213	14.9-24	8	128A6/124A8	1265	378	W13-W11, W12	583	3710	1800	1.8	57	35	IND	5999110837123
28	6X18333	11.2-28	8	118A6/114A8	1205	284	W10	563	3530	1320	2.4	37	32	IND	5999110836331
28	6X18233	12.4-28	8	123A6/120A8	1260	315	W11-W9, W10	589	3704	1550	2.3	46	34	IND	5999110837130
28	6X18253	14.9-28	8	130A6/126A8	1365	378	W13-W11, W12	634	4013	1900	1.8	66	35.5	IND	5999110837147
30	6X18393	16.9-30	8	137A6/123A8	1485	429	W15L	685	4381	2300	1.7	82	38	IND	5999110836355
30	6X18273	18.4-30	10	145A6/141A8	1545	467	W16L-W15L	714	4542	2900	1.8	95	38.5	IND	5999110837154
32	6X18293	8.3-32	8	111A6/107A8	1195	211	W7	572	3585	1090	3.2	31	28.5	IND	5999110837161
38	6X23033	13.6-38	8	131A6/127A8	1565	345	W12	738	4601	1950	2.0	70	36.5	IND	5999110840314
38	6X23013	15.5-38	10	135A6/131A8	1585	394	W14L	746	4660	2180	2.1	75	32.0	IND	5999110840291
38	6X23023	16.9-38	10	143A6/139A8	1685	429	W15L	788	4954	2650	2.1	98	38.0	IND	5999110840307

*Tubeless

FARM SPECIALIST TB - RC

Tractors, Row Crop Applications

This is the Row Crop version of the Farm Specialist Tractor Bias tire with the equivalent performance.



Item Number	Size	Star /PR	LI/SI	Mounted Diameter (mm)	Mounted Width (mm)	Load Capacity (kg/tyre)	Rated Speed (km/h)	Inflation Pressure (bar)	Weight (kg)	CoO	EAN
6X10683	9.5-24	8	112A6	1056	232	1000	40	2.8	25.78	IN	5999110824116
6X10693	9.5-32	8	116A6	1255	235	1120	40	2.8	33	IN	5999110824123
6X10703	9.5-36	8	118A6	1355	241	1180	40	2.8	40	IN	5999110824130

FARM SPECIALIST TR - II BIG VOLUME, HARVESTER

Various Farming, Large Tractor Applications

The FSTR-II is a line of R1-W radial tires with rim diameters ranging from a 16" to 48". The radial construction of these tires will deliver the traction and smooth ride for farmers to increase their efficiency in the field.



Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
26"	6X11861	750/65R26 158A8/158B TL	761	1600	710	4761	DW25B	217	46											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	5470	6450	7330	8210	8990	9775				
										10 km/h	3570	4210	4780	5355	5865	6375				
										25 km/h	2640	3110	3540	3960	4340	4720				
										30 km/h	2550	3000	3410	3820	4180	4550				
										40 km/h	2380	2805	3190	3570	3910	4250				
										50 km/h	2380	2805	3190	3570	3910	4250				
										65 km/h										
										26"	6X11871	750/65R26 166A8/166B TL	761	1600	710	4761	DW25B	223	46	
Load Capacity (kg/tyre)																				
Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8											3.2
Static	5470	6450	7330	8210	8990	9775	10850	12190												
10 km/h	3570	4210	4780	5355	5865	6375	7075	7950												
25 km/h	2640	3110	3540	3960	4340	4720	5235	5880												
30 km/h	2550	3000	3410	3820	4180	4550	5050	5670												
40 km/h	2380	2805	3190	3570	3910	4250	4720	5300												
50 km/h	2380	2805	3190	3570	3910	4250	4720	5300												
65 km/h																				
26"	6X11841	620/75R26 166A8/166B TL	641	1605	722	4778	DW20B	186	45											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4510	5360	6095	6825	7435	8045	9140	10240	11215	12190
										10 km/h	2940	3500	3975	4450	4850	5250	5960	6680	7310	7950
										25 km/h	2180	2590	2940	3290	3590	3880	4410	4940	5410	5880
										30 km/h	2100	2495	2835	3175	3460	3740	4250	4760	5220	5670
										40 km/h	1960	2330	2650	2970	3230	3500	3975	4450	4875	5300
										50 km/h	1960	2330	2650	2970	3230	3500	3975	4450	4875	5300
										65 km/h										
										32"	6X11851	650/75R32 172A8/172B TL	658	1796	810	5362	DW21B	254	48	
Load Capacity (kg/tyre)																				
Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8											3.2
Static	5515	6520	7395	8270	9025	9780	11155	12535	13330											14490
10 km/h	3600	4250	4820	5395	5885	6380	7275	8175	8690											9450
25 km/h	2660	3145	3570	3990	4355	4720	5380	6050	6430											6990
30 km/h	2565	3030	3440	3850	4200	4550	5190	5830	6200											6740
40 km/h	2400	2830	3215	3600	3920	4250	4850	5450	5795											6300
50 km/h	2400	2830	3215	3600	3920	4250	4850	5450	5795											6300
65 km/h																				

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)		
32"	6X11751	800/65R32 172A8/172B TL	797	1833	820	5460	DW25B	304	57		
Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static	7020	8270	9400	10530	11530	12535	12895	14490		
	10 km/h	4580	5395	6130	6870	7520	8175	8410	9450		
	25 km/h	3390	3990	4540	5080	5565	6050	6220	6990		
	30 km/h	3265	3850	4370	4900	5365	5830	6000	6740		
	40 km/h	3050	3600	4090	4580	5010	5450	5610	6300		
	50 km/h	3050	3600	4090	4580	5010	5450	5610	6300		
	65 km/h										
32"	6X11761	800/65R32 178A8/178B TL	797	1833	820	5460	DW27B	310	57		
Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static	7020	8270	9400	10530	11530	12535	12895	14490	15870	17250
	10 km/h	4580	5395	6130	6870	7520	8175	8410	9450	10350	11250
	25 km/h	3390	3990	4540	5080	5565	6050	6220	6990	7660	8325
	30 km/h	3265	3850	4370	4900	5365	5830	6000	6740	7380	8025
	40 km/h	3050	3600	4090	4580	5010	5450	5610	6300	6900	7500
	50 km/h	3050	3600	4090	4580	5010	5450	5610	6300	6900	7500
	65 km/h										
32"	6X11771	IF800/65R32 181B/181D TL	797	1833	820	5460	DW28B	327	57		
Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static	7020	8350	9490	10625	11575	12520	14230	15940	17460	18975
	10 km/h	4580	5445	6190	6930	7550	8170	9280	10395	11385	12375
	25 km/h	3390	4030	4580	5130	5585	6040	6870	7690	8425	9160
	30 km/h	3265	3880	4410	4940	5385	5825	6620	7415	8120	8830
	40 km/h	3140	3740	4250	4760	5180	5610	6370	7140	7820	8500
	50 km/h	3050	3630	4125	4620	5030	5445	6190	6930	7590	8250
	65 km/h	3050	3630	4125	4620	5030	5445	6190	6930	7590	8250
32"	6X11801	IF1050/50R32 185B/185D TL	1038	1863	833	5686	36.0 VA	371	40		
Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static	9360	11060	12550	14040	15320	16595	17460	18935	18975	21275
	10 km/h	6105	7215	8185	9160	9990	10820	11385	12350	12375	13875
	25 km/h	4520	5340	6060	6780	7390	8010	8425	9140	9160	10270
	30 km/h	4355	5150	5840	6530	7125	7720	8120	8810	8830	9900
	40 km/h	4190	4950	5620	6290	6860	7430	7820	8480	8500	9530
	50 km/h	4070	4810	5460	6105	6660	7215	7590	8230	8250	9250
	65 km/h	4070	4810	5460	6105	6660	7215	7590	8230	8250	9250
32"	6X11781	IF900/60R32 185B/185D TL	891	1910	855	5688	DW31B	385	56		
Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static	7870	9360	10640	11910	12980	14040	15955	17870	19570	21275
	10 km/h	5130	6105	6940	7770	8460	9160	10405	11655	12765	13875
	25 km/h	3800	4520	5130	5750	6260	6780	7700	8625	9445	10270
	30 km/h	3660	4355	4950	5540	6040	6530	7420	8310	9105	9900
	40 km/h	3525	4190	4760	5335	5810	6290	7145	8000	8765	9530
	50 km/h	3420	4070	4625	5180	5640	6105	6940	7770	8510	9250
	65 km/h	3420	4070	4625	5180	5640	6105	6940	7770	8510	9250

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)		
38"	6X11791	IF800/70R38 184B/184D TL	805	2085	927	6190	DW27B	398	60		
Load Capacity (kg/tyre)											
Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
Static		9110	10760	12210	13660	14900	16145	18420	20700		
10 km/h		5940	7020	7965	8910	9720	10530	12015	13500		
25 km/h		4395	5195	5890	6590	7190	7790	8890	9990		
30 km/h		4240	5010	5680	6355	6930	7510	8570	9630		
40 km/h		4080	4820	5470	6120	6670	7230	8250	9270		
50 km/h		3960	4680	5310	5940	6480	7020	8010	9000		
65 km/h		3960	4680	5310	5940	6480	7020	8010	9000		

FARM SPECIALIST TR - II 65 SERIES

Various Farming, Tractor Applications

Superior radial construction for optimum ground pressure distribution and low ground compaction. Good self-cleaning properties due to specially angled lugs. Excellent driving on and off-the-road. Superior tire life.



Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)		
24"	6X11601	440/65R24 128D/131A8 TL	437	1190	530	3556	W14L	75	45		
Load Capacity (kg/tyre)											
Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
Static		2510	2960	3360	3770	4125	4485				
10 km/h		1640	1930	2190	2460	2690	2925				
25 km/h		1210	1430	1620	1820	1990	2165				
30 km/h		1170	1380	1565	1750	1920	2090				
40 km/h		1090	1290	1460	1640	1790	1950				
50 km/h		1040	1230	1395	1565	1710	1890				
65 km/h		990	1170	1330	1490	1630	1800				
24"	6X11621	480/65R24 133D/136A8 TL	469	1224	541	3653	W15L	83	46		
Load Capacity (kg/tyre)											
Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
Static		2880	3410	3890	4370	4740	5150				
10 km/h		1880	2220	2540	2850	3090	3360				
25 km/h		1390	1645	1880	2110	2290	2485				
30 km/h		1340	1585	1810	2030	2205	2400				
40 km/h		1250	1480	1690	1900	2060	2240				
50 km/h		1195	1420	1615	1840	1970	2165				
65 km/h		1140	1350	1540	1750	1875	2060				

Farm Specialist TR-II 65 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
24"	6X11641	540/65R24 140D/143A8 TL	540	1316	585	3918	W16L	114.5	48											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3510	4140	4700	5265	5765	6270				
										10 km/h	2290	2700	3065	3430	3760	4090				
										25 km/h	1690	1995	2270	2540	2780	3025				
										30 km/h	1630	1920	2190	2450	2680	2915				
										40 km/h	1525	1800	2040	2290	2510	2725				
										50 km/h	1460	1720	1955	2185	2395	2625				
										65 km/h	1390	1640	1860	2080	2280	2500				
28"	6X11611	440/65R28 131D/134A8 TL	439	1288	579	3862	W14L	84	45											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2730	3220	3660	4095	4485	4875				
										10 km/h	1780	2100	2385	2670	2925	3180				
										25 km/h	1320	1550	1765	1980	2165	2350				
										30 km/h	1270	1500	1700	1905	2090	2270				
										40 km/h	1190	1400	1590	1780	1950	2120				
										50 km/h	1135	1335	1525	1700	1865	2050				
										65 km/h	1080	1270	1450	1620	1775	1950				
28"	6X11631	480/65R28 136D/139A8 TL	466	1336	593	4002	W15L	92	46											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3130	3690	4190	4695	5140	5590				
										10 km/h	2040	2405	2730	3060	3350	3645				
										25 km/h	1510	1780	2020	2265	2480	2700				
										30 km/h	1455	1715	1950	2180	2390	2600				
										40 km/h	1360	1600	1820	2040	2235	2430				
										50 km/h	1300	1535	1745	1955	2130	2350				
										65 km/h	1240	1460	1660	1860	2030	2240				
28"	6X11651	540/65R28 142D/145A8 TL	533	1424	631	4257	W16L	128	48											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3735	4400	5000	5600	6140	6670				
										10 km/h	2435	2870	3260	3650	4000	4350				
										25 km/h	1800	2125	2410	2700	2960	3220				
										30 km/h	1740	2050	2330	2610	2850	3100				
										40 km/h	1620	1910	2175	2435	2670	2900				
										50 km/h	1555	1825	2080	2330	2550	2785				
										65 km/h	1480	1740	1980	2220	2430	2650				
28"	6X11691	600/65R28 147D/150A8 TL	593	1486	652	4364	W18L	143	49											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4400	5200	5940	6670	7090	7705				
										10 km/h	2870	3390	3870	4350	4620	5025				
										25 km/h	2125	2510	2865	3220	3420	3720				
										30 km/h	2050	2420	2760	3100	3300	3580				
										40 km/h	1910	2260	2580	2900	3080	3350				
										50 km/h	1825	2165	2470	2785	2945	3230				
										65 km/h	1740	2060	2350	2650	2805	3075				

Farm Specialist TR-II 65 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
30"	6X11661	540/65R30 143D/146A8 TL	535	1477	653	4422	W16L	135	48											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3860	4550	5175	5795	6350	6900				
										10 km/h	2520	2970	3375	3780	4140	4500				
										25 km/h	1860	2200	2500	2800	3060	3330				
										30 km/h	1800	2120	2410	2700	2950	3210				
										40 km/h	1680	1980	2250	2520	2760	3000				
										50 km/h	1605	1890	2155	2405	2635	2860				
										65 km/h	1530	1800	2050	2290	2510	2725				
34"	6X11671	540/65R34 145D/148A8 TL	539	1581	716	4746	W16L	138	48											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4140	4890	5580	6270	6665	7245				
										10 km/h	2700	3190	3640	4090	4350	4725				
										25 km/h	1995	2360	2690	3020	3220	3500				
										30 km/h	1920	2270	2595	2915	3100	3370				
										40 km/h	1800	2125	2425	2725	2900	3150				
										50 km/h	1720	2025	2320	2625	2770	3045				
										65 km/h	1640	1930	2210	2500	2640	2900				
34"	6X11701	600/65R34 151D/154A8 TL	539	1581	716	4746	W18L	138	48											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4780	5650	6450	7245	7935	8625				
										10 km/h	3120	3685	4205	4725	5175	5625				
										25 km/h	2310	2730	3110	3500	3830	4160				
										30 km/h	2225	2630	3000	3370	3690	4010				
										40 km/h	2080	2460	2800	3150	3450	3750				
										50 km/h	1985	2345	2680	3045	3295	3625				
										65 km/h	1890	2235	2550	2900	3140	3450				
38"	6X11681	540/65R38 147D/150A8 TL	539	1682	759	5058	W16L	151	48											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4315	5085	5780	6470	7090	7705				
										10 km/h	2810	3320	3770	4220	4620	5025				
										25 km/h	2080	2450	2790	3120	3420	3720				
										30 km/h	2010	2365	2690	3010	3300	3585				
										40 km/h	1875	2210	2510	2810	3080	3350				
										50 km/h	1795	2110	2400	2690	2945	3230				
										65 km/h	1710	2010	2285	2560	2805	3075				
38"	6X11711	600/65R38 153D/156A8 TL	604	1768	796	5311	W18L	190	49											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	5085	6010	6860	7705	8460	9200				
										10 km/h	3320	3920	4470	5025	5520	6000				
										25 km/h	2450	2900	3310	3720	4085	4440				
										30 km/h	2365	2795	3190	3585	3940	4280				
										40 km/h	2210	2610	2980	3350	3680	4000				
										50 km/h	2110	2500	2845	3230	3520	3835				
										65 km/h	2010	2380	2710	3075	3350	3650				

Farm Specialist TR-II 65 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
38"	6X11721	650/65R38 157D/160A8 TL	653	1812	815	5439	DW20B	239	51											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	5795	6830	7760	8690	9520	10350				
										10 km/h	3780	4455	5060	5670	6210	6750				
										25 km/h	2800	3300	3745	4195	4595	4995				
										30 km/h	2700	3180	3610	4045	4430	4815				
										40 km/h	2520	2970	3375	3780	4140	4500				
										50 km/h	2405	2835	3225	3610	3960	4330				
										65 km/h	2290	2700	3070	3440	3770	4125				
42"	6X11731	650/65R42 158D/161A8 TL	651	1921	865	5775	DW20B	261	51											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	5960	7020	7980	8935	9790	10640				
										10 km/h	3885	4580	5200	5830	6380	6940				
										25 km/h	2875	3390	3850	4310	4720	5130				
										30 km/h	2770	3265	3710	4160	4550	4950				
										40 km/h	2590	3050	3470	3885	4255	4625				
										50 km/h	2480	2920	3320	3710	4065	4465				
										65 km/h	2360	2780	3160	3535	3870	4250				
42"	6X11741	650/65R42 165D/168A8 TL	651	1921	865	5775	DW20B	275	51											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	5960	7020	7980	8935	9790	10640	11460	12880		
										10 km/h	3885	4580	5200	5830	6380	6940	7475	8400		
										25 km/h	2875	3390	3850	4310	4720	5130	5530	6215		
										30 km/h	2770	3265	3710	4160	4550	4950	5330	5990		
										40 km/h	2590	3050	3470	3885	4255	4625	4980	5600		
										50 km/h	2480	2920	3320	3710	4065	4465	4760	5410		
										65 km/h	2360	2780	3160	3535	3870	4250	4535	5150		

FARM SPECIALIST TR - II 70 SERIES

Various Farming, Tractor Applications

The FSTR-II is a line of R1-W radial tires with rim diameters ranging from a 16" to 48". The radial construction of these tires will deliver the traction and smooth ride for farmers to increase their efficiency in the field.



Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)			
16"	6X11911	260/70R16 109A8/109B TL	250	767	345	2293	W8	23,5	31			
										Load Capacity (kg/tyre)		
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static										2370	
	10 km/h										1545	
	25 km/h										1130	
	30 km/h										1100	
	40 km/h										1030	
	50 km/h										1030	
	65 km/h											
16"	6X11921	280/70R16 112A8/112B TL	273	787	357	2350	W9	25,5	32			
										Load Capacity (kg/tyre)		
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static							1955	2290	2575		
	10 km/h							1275	1495	1680		
	25 km/h							935	1095	1230		
	30 km/h							910	1070	1200		
	40 km/h							850	1000	1120		
	50 km/h							850	1000	1120		
	65 km/h											
16"	6X11931	280/70R18 114A8/114B TL	273	849	385	2542	W9	29	32			
										Load Capacity (kg/tyre)		
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static							2070	2415	2710		
	10 km/h							1350	1575	1770		
	25 km/h							990	1155	1300		
	30 km/h							960	1120	1260		
	40 km/h							900	1050	1180		
	50 km/h							900	1050	1180		
	65 km/h											
20"	6X11941	280/70R20 116A8/116B TL	273	899	412	2698	W9	32	32			
										Load Capacity (kg/tyre)		
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static										2875	
	10 km/h										1875	
	25 km/h										1375	
	30 km/h										1340	
	40 km/h										1250	
	50 km/h										1250	
	65 km/h											

Farm Specialist TR-II 70 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
20"	6X11951	300/70R20 120A8/120B TL	290	948	427	2840	W9	36	33											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						2440	2865	3220		
										10 km/h						1590	1870	2100		
										25 km/h						1165	1370	1540		
										30 km/h						1130	1330	1500		
										40 km/h						1060	1245	1400		
										50 km/h						1060	1245	1400		
										65 km/h										
20"	6X11961	320/70R20 123A8/123B TL	316	985	450	2947	W10	40	34											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						2645	3170	3565		
										10 km/h						1725	2070	2325		
										25 km/h						1265	1520	1705		
										30 km/h						1230	1475	1660		
										40 km/h						1150	1380	1550		
										50 km/h						1150	1380	1550		
										65 km/h										
24"	6X11381	360/70R24 122A8/122B TL	354	1135	518	3398	W11	60	42											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	1930	2280	2590	2900	3170	3450				
										10 km/h	1260	1485	1690	1890	2070	2250				
										25 km/h	930	1100	1250	1400	1530	1665				
										30 km/h	900	1060	1200	1350	1480	1605				
										40 km/h	840	990	1125	1260	1380	1500				
										50 km/h	840	990	1125	1260	1380	1500				
										65 km/h										
24"	6X11401	380/70R24 125A8/125B TL	384	1198	533	3574	W12	65	42											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2125	2505	2845	3190	3490	3795				
										10 km/h	1385	1630	1855	2080	2280	2475				
										25 km/h	1025	1210	1370	1540	1685	1830				
										30 km/h	990	1165	1320	1480	1620	1765				
										40 km/h	920	1090	1240	1385	1520	1650				
										50 km/h	920	1090	1240	1385	1520	1650				
										65 km/h										
24"	6X11421	420/70R24 130A8/130B TL	426	1231	563	3675	W13	81	45											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2450	2880	3280	3670	4020	4370				
										10 km/h	1595	1880	2140	2390	2620	2850				
										25 km/h	1180	1390	1580	1770	1940	2110				
										30 km/h	1140	1340	1525	1710	1870	2030				
										40 km/h	1060	1250	1425	1595	1750	1900				
										50 km/h	1060	1250	1425	1595	1750	1900				
										65 km/h										

Farm Specialist TR-II 70 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
24"	6X11451	480/70R24 138A8/138B TL	488	1314	580	3913	W15L	101	47											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3040	3580	4070	4560	4990	5430				
										10 km/h	1980	2335	2655	2970	3260	3540				
										25 km/h	1470	1730	1965	2200	2410	2620				
										30 km/h	1410	1670	1890	2120	2320	2525				
										40 km/h	1320	1560	1770	1980	2170	2360				
										50 km/h	1320	1560	1770	1980	2170	2360				
										65 km/h										
28"	6X11391	360/70R28 125A8/125B TL	356	1258	566	3777	W11	67	42											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2125	2505	2845	3190	3490	3795				
										10 km/h	1385	1630	1855	2080	2280	2475				
										25 km/h	1025	1210	1370	1540	1685	1830				
										30 km/h	990	1165	1320	1480	1620	1765				
										40 km/h	920	1090	1240	1385	1520	1650				
										50 km/h	920	1090	1240	1385	1520	1650				
										65 km/h										
28"	6X11411	380/70R28 127A8/127B TL	382	1304	589	3903	W12	73	42											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2250	2660	3020	3380	3700	4025				
										10 km/h	1470	1730	1970	2205	2415	2625				
										25 km/h	1090	1280	1460	1630	1790	1940				
										30 km/h	1050	1235	1400	1570	1720	1870				
										40 km/h	980	1155	1310	1470	1610	1750				
										50 km/h	980	1155	1310	1470	1610	1750				
										65 km/h										
28"	6X11431	420/70R28 133A8/133B TL	414	1350	597	4044	W13	90	45											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2650	3130	3550	3980	4360	4740				
										10 km/h	1730	2040	2320	2595	2840	3090				
										25 km/h	1280	1510	1715	1920	2100	2290				
										30 km/h	1230	1455	1650	1850	2030	2200				
										40 km/h	1150	1360	1545	1730	1895	2060				
										50 km/h	1150	1360	1545	1730	1895	2060				
										65 km/h										
28"	6X11461	480/70R28 140A8/140B TL	477	1431	643	4279	W15L	111	47											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3220	3795	4310	4830	5290	5750				
										10 km/h	2100	2475	2810	3150	3450	3750				
										25 km/h	1550	1830	2080	2330	2550	2775				
										30 km/h	1500	1765	2005	2250	2460	2675				
										40 km/h	1400	1650	1875	2100	2300	2500				
										50 km/h	1400	1650	1875	2100	2300	2500				
										65 km/h										

Farm Specialist TR-II 70 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
30"	6X11441	420/70R30 134A8/134B TL	422	1384	615	4153	W13	95	45											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2730	3220	3660	4095	4485	4875				
										10 km/h	1780	2100	2385	2670	2925	3180				
										25 km/h	1320	1550	1765	1980	2165	2350				
										30 km/h	1270	1500	1700	1905	2090	2270				
										40 km/h	1190	1400	1590	1780	1950	2120				
										50 km/h	1190	1400	1590	1780	1950	2120				
										65 km/h										
										30"	6X11471	480/70R30 141A8/141B TL	480	1463	653	4382	W15L	117	47	
																				Load Capacity (kg/tyre)
Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8											3.2
Static	3320	3910	4440	4975	5450	5920														
10 km/h	2160	2550	2900	3245	3550	3860														
25 km/h	1600	1885	2140	2400	2630	2860														
30 km/h	1540	1820	2065	2310	2535	2755														
40 km/h	1440	1700	1930	2160	2370	2575														
50 km/h	1440	1700	1930	2160	2370	2575														
65 km/h																				
30"	6X11501	520/70R30 151A8/151B TL	522	1528	692	4572	W16L	148	48											
																				Load Capacity (kg/tyre)
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3735	4400	5000	5600	6135	6670	7060	7935		
										10 km/h	2435	2870	3260	3650	4000	4350	4605	5175		
										25 km/h	1800	2125	2410	2700	2960	3220	3410	3830		
										30 km/h	1740	2050	2330	2610	2855	3100	3285	3690		
										40 km/h	1620	1910	2175	2435	2670	2900	3070	3450		
										50 km/h	1620	1910	2175	2435	2670	2900	3070	3450		
										65 km/h										
										30"	6X13961	600/70R30 152D/155A8 TL	586	1610	716	4804	DW20B	179	51	
																				Load Capacity (kg/tyre)
Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8											3.2
Static	4990	5880	6680	7490	8200	8910														
10 km/h	3255	3835	4360	4880	5350	5810														
25 km/h	2410	2840	3225	3610	3960	4300														
30 km/h	2320	2740	3110	3480	3815	4145														
40 km/h	2170	2560	2905	3255	3565	3875														
50 km/h	2075	2445	2775	3110	3400	3730														
65 km/h	1975	2330	2645	2960	3240	3550														
34"	6X11481	480/70R34 143A8/143B TL	487	1571	720	4717	W15L	129	47											
																				Load Capacity (kg/tyre)
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3510	4140	4700	5265	5765	6270				
										10 km/h	2290	2700	3065	3430	3760	4090				
										25 km/h	1690	1995	2270	2540	2780	3025				
										30 km/h	1630	1920	2190	2450	2680	2915				
										40 km/h	1525	1800	2040	2290	2510	2725				
										50 km/h	1525	1800	2040	2290	2510	2725				
										65 km/h										

Farm Specialist TR-II 70 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
34"	6X11511	520/70R34 148A8/148B TL	530	1639	739	4916	W16L	155	48											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4060	4780	5430	6085	6665	7245				
										10 km/h	2645	3120	3540	3970	4350	4725				
										25 km/h	1960	2310	2620	2940	3220	3500				
										30 km/h	1890	2225	2530	2830	3100	3370				
										40 km/h	1760	2080	2360	2645	2900	3150				
										50 km/h	1760	2080	2360	2645	2900	3150				
										65 km/h										
34"	6X11561	600/70R34 160D/163A8 TL	586	1705	784	5107	DW20B	202	51											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4930	5830	6615	7400	8070	8745	9980	11210		
										10 km/h	3220	3800	4310	4825	5265	5700	6510	7310		
										25 km/h	2380	2810	3190	3570	3895	4220	4815	5410		
										30 km/h	2295	2710	3080	3440	3755	4070	4640	5215		
										40 km/h	2145	2535	2875	3220	3510	3800	4340	4875		
										50 km/h	2050	2425	2750	3075	3350	3635	4150	4725		
										65 km/h	1950	2310	2620	2930	3190	3460	3950	4500		
38"	6X11491	480/70R38 145A8/145B TL	483	1683	763	5062	W15L	143	47											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3735	4400	5000	5600	6135	6670				
										10 km/h	2435	2870	3260	3650	4000	4350				
										25 km/h	1800	2125	2410	2700	2960	3220				
										30 km/h	1740	2050	2330	2610	2855	3100				
										40 km/h	1620	1910	2175	2435	2670	2900				
										50 km/h	1620	1910	2175	2435	2670	2900				
										65 km/h										
38"	6X11521	520/70R38 150A8/150B TL	529	1743	787	5238	W16L	168	48											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4315	5085	5780	6470	7090	7705				
										10 km/h	2810	3320	3770	4220	4620	5025				
										25 km/h	2080	2450	2790	3120	3420	3720				
										30 km/h	2010	2365	2690	3010	3300	3585				
										40 km/h	1875	2210	2510	2810	3080	3350				
										50 km/h	1875	2210	2510	2810	3080	3350				
										65 km/h										
38"	6X13981	580/70R38 155D/158A8 TL	580	1822	811	5465	W18L	203	51											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	5470	6450	7350	8210	8990	9775				
										10 km/h	3570	4210	4780	5355	5865	6375				
										25 km/h	2640	3110	3540	3960	4340	4720				
										30 km/h	2550	3000	3410	3820	4180	4550				
										40 km/h	2380	2805	3190	3570	3910	4250				
										50 km/h	2275	2680	3045	3415	3740	4070				
										65 km/h	2165	2550	2900	3250	3560	3875				

Farm Specialist TR-II 70 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)			
38"	6X11541	580/70R38 170A8/170B TL	580	1822	811	5465	W18L	224	51			
		Load Capacity (kg/tyre)										
		Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
		Static	4990	5880	6680	7490	8200	8910	11315	12560	13800	
		10 km/h	3255	3835	4360	4880	5350	5810	7380	8190	9000	
		25 km/h	2410	2840	3225	3610	3960	4300	5460	6060	6660	
		30 km/h	2320	2740	3110	3480	3815	4145	5260	5840	6420	
		40 km/h	2170	2560	2905	3255	3565	3875	4920	5460	6000	
		50 km/h	2170	2560	2905	3255	3565	3875	4920	5460	6000	
		65 km/h										
		38"	6X13951	710/70R38 166D/169A8 TL	741	1950	863	5837	DW23B	291	58	
				Load Capacity (kg/tyre)								
Speed \ Pressure (bar)	0.6			0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
Static	7470			8800	10005	11205	12270	13340				
10 km/h	4870			5740	6525	7310	8000	8700				
25 km/h	3605			4250	4830	5410	5920	6440				
30 km/h	3475			4095	4655	5210	5710	6205				
40 km/h	3250			3830	4350	4870	5335	5800				
50 km/h	3105			3655	4160	4650	5100	5565				
65 km/h	2955			3480	3960	4430	4855	5300				
42"	6X11551			580/70R42 158A8/158B TL	575	1870	835	5625	W18L	216	51	
				Load Capacity (kg/tyre)								
		Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
		Static	5470	6450	7330	8210	8990	9775				
		10 km/h	3570	4210	4780	5355	5865	6375				
		25 km/h	2640	3110	3540	3960	4340	4720				
		30 km/h	2550	3000	3410	3820	4180	4550				
		40 km/h	2380	2805	3190	3570	3910	4250				
		50 km/h	2380	2805	3190	3570	3910	4250				
		65 km/h										
		42"	6X11571	620/70R42 160A8/160B TL	626	1917	841	5762	DW20B	238	52	
				Load Capacity (kg/tyre)								
Speed \ Pressure (bar)	0.6			0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
Static	5795			6830	7760	8690	9520	10350				
10 km/h	3780			4455	5060	5670	6210	6750				
25 km/h	2800			3300	3745	4195	4595	4995				
30 km/h	2695			3180	3610	4045	4430	4815				
40 km/h	2520			2970	3375	3780	4140	4500				
50 km/h	2520			2970	3375	3780	4140	4500				
65 km/h												
42"	6X13971			710/70R42 173D/176A8 TL	743	2079	937	6234	DW23B	329	58	
				Load Capacity (kg/tyre)								
		Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
		Static	7920	9335	10610	11880	13010	14145	13305	14950		
		10 km/h	5165	6090	6920	7750	8490	9225	8680	9750		
		25 km/h	3820	4505	5120	5730	6280	6830	6420	7215		
		30 km/h	3685	4340	4935	5530	6050	6580	6190	6955		
		40 km/h	3440	4060	4610	5165	5660	6150	5785	6500		
		50 km/h	3285	3875	4410	4935	5410	5880	5525	7455		
		65 km/h	3130	3690	4200	4700	5150	5600	5260	7100		

Farm Specialist TR-II 70 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)		
42"	6X11591	710/75R42 175D/178A8 TL	728	2127	961	6356	DW23B	370	62		
Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static	7590	8970	10180	11385	12420	13455	15350	17250		
	10 km/h	4950	5850	6640	7425	8100	8775	10010	11250		
	25 km/h	3660	4330	4910	5495	5990	6490	7410	8325		
	30 km/h	3530	4170	4735	5300	5780	6260	7140	8025		
	40 km/h	3300	3900	4425	4950	5400	5850	6675	7500		
	50 km/h	3150	3730	4230	4730	5155	5585	6375	7245		
	65 km/h	3000	3550	4030	4505	4910	5320	6070	6900		

FARM SPECIALIST TR - II 80 SERIES

Various Farming, Tractor Applications

Superior radial construction for optimum ground pressure distribution and low ground compaction. Good self-cleaning properties due to specially angled lugs. Excellent driving on and off-the-road. Superior tire life.



Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)		
38"	6X11131	380/80R38 142A8/142B TL	377	1595	738	4803	W12	97	46		
Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static	2680	3170	3595	4020	4390	4750	5425	6095		
	10 km/h	1750	2070	2345	2620	2860	3100	3540	3975		
	25 km/h	1290	1530	1735	1940	2120	2290	2620	2940		
	30 km/h	1250	1470	1670	1870	2040	2210	2520	2835		
	40 km/h	1165	1380	1560	1750	1910	2070	2360	2650		
	50 km/h	1165	1380	1560	1750	1910	2070	2360	2650		
	65 km/h										
46"	6X11831	420/80R46 151A8/151B TL	398	1848	849	5272	W13	142	40		
Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static	3490	4125	4680	5240	5710	6190	7060	7935		
	10 km/h	2280	2690	3050	3415	3725	4040	4605	5175		
	25 km/h	1685	1990	2260	2530	2760	2990	3410	3830		
	30 km/h	1620	1920	2180	2435	2660	2880	3285	3690		
	40 km/h	1520	1790	2035	2280	2480	2690	3070	3450		
	50 km/h	1520	1790	2035	2280	2480	2690	3070	3450		
	65 km/h										

Farm Specialist TR-II 80 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
46"	6X11321	480/80R46 158A8/158B TL	490	1971	905	5936	DW16L	188	49											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4300	5080	5770	6450	7040	7625	8700	9775		
										10 km/h	2805	3315	3760	4210	4590	4970	5670	6375		
										25 km/h	2075	2450	2780	3110	3400	3680	4200	4720		
										30 km/h	2000	2365	2680	3000	3270	3550	4050	4550		
										40 km/h	1870	2210	2510	2805	3060	3315	3780	4250		
										50 km/h	1870	2210	2510	2805	3060	3315	3780	4250		
										65 km/h										

FARM SPECIALIST TR - II 85 SERIES

Various Farming, Tractor Applications

Superior radial construction for optimum ground pressure distribution and low ground compaction. Good self-cleaning properties due to specially angled lugs. Excellent driving on and off-the-road. Superior tire life.



Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
20"	6X11061	280/85R20 112A8/112B TL	282	986	446	2943	W10	38	42											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	1440	1700	1930	2160	2370	2575				
										10 km/h	940	1110	1260	1410	1545	1680				
										25 km/h	695	820	930	1040	1140	1240				
										30 km/h	670	790	900	1010	1100	1200				
										40 km/h	630	740	840	940	1030	1120				
										50 km/h	630	740	840	940	1030	1120				
										65 km/h										
24"	6X11071	280/85R24 115A8/115B TL	285	1080	494	3239	W10	44	42											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	1565	1840	2095	2350	2570	2795				
										10 km/h	1020	1200	1370	1530	1680	1820				
										25 km/h	755	890	1010	1130	1240	1350				
										30 km/h	730	860	975	1090	1195	1300				
										40 km/h	680	800	910	1020	1120	1215				
										50 km/h	680	800	910	1020	1120	1215				
										65 km/h										

Farm Specialist TR-II 85 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)			
24"	6X11091	320/85R24 122A8/122B TL	322	1139	520	3400	W11	54	43			
	Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static		1930	2280	2590	2900	3170	3450				
	10 km/h		1260	1485	1690	1890	2070	2250				
	25 km/h		930	1100	1250	1400	1530	1665				
	30 km/h		900	1060	1200	1350	1480	1605				
	40 km/h		840	990	1125	1260	1380	1500				
	50 km/h		840	990	1125	1260	1380	1500				
	65 km/h											
24"	6X11111	340/85R24 125A8/125B TL	353	1191	547	3558	W12	64	45			
	Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static		2125	2505	2845	3190	3490	3795				
	10 km/h		1385	1630	1855	2080	2280	2475				
	25 km/h		1025	1210	1370	1540	1685	1830				
	30 km/h		990	1165	1320	1480	1620	1765				
	40 km/h		920	1090	1240	1385	1520	1650				
	50 km/h		920	1090	1240	1385	1520	1650				
	65 km/h											
24"	6X11141	380/85R24 131A8/131B TL	382	1273	566	3794	W12	76	47			
	Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static		2510	2960	3360	3770	4125	4485				
	10 km/h		1640	1930	2190	2460	2690	2925				
	25 km/h		1210	1430	1620	1820	1990	2165				
	30 km/h		1170	1380	1565	1750	1920	2090				
	40 km/h		1090	1290	1460	1640	1790	1950				
	50 km/h		1090	1290	1460	1640	1790	1950				
	65 km/h											
24"	6X11201	420/85R24 137A8/137B TL	439	1322	593	3935	W15L	88	48			
	Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static		2960	3490	3970	4440	4870	5290				
	10 km/h		1930	2280	2590	2900	3170	3450				
	25 km/h		1430	1685	1915	2145	2350	2550				
	30 km/h		1380	1620	1845	2070	2260	2460				
	40 km/h		1290	1520	1725	1930	2115	2300				
	50 km/h		1290	1520	1725	1930	2115	2300				
	65 km/h											
28"	6X11081	280/85R28 118A8/118B TL	283	1182	540	3555	W10	49	42			
	Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static		1700	2000	2280	2550	2790	3035				
	10 km/h		1110	1310	1485	1660	1820	1980				
	25 km/h		820	970	1100	1230	1350	1465				
	30 km/h		790	930	1060	1185	1300	1410				
	40 km/h		740	870	990	1110	1210	1320				
	50 km/h		740	870	990	1110	1210	1320				
	65 km/h											

Farm Specialist TR-II 85 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)		
28"	6X11101	320/85R28 124A8/124B TL	321	1258	575	3776	W11	59	43		
										Load Capacity (kg/tyre)	
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static	2060	2430	2760	3090	3385	3680				
	10 km/h	1340	1580	1800	2015	2210	2400				
	25 km/h	995	1170	1330	1490	1630	1775				
	30 km/h	960	1130	1280	1440	1575	1710				
	40 km/h	895	1055	1200	1340	1470	1600				
	50 km/h	895	1055	1200	1340	1470	1600				
	65 km/h										
	28"	6X11121	340/85R28 127A8/127B TL	353	1308	598	3921	W12	71	45	
											Load Capacity (kg/tyre)
Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
Static		2250	2660	3020	3380	3700	4025				
10 km/h		1470	1730	1970	2205	2415	2625				
25 km/h		1090	1280	1460	1630	1790	1940				
30 km/h		1050	1235	1400	1570	1720	1870				
40 km/h		980	1155	1310	1470	1610	1750				
50 km/h		980	1155	1310	1470	1610	1750				
65 km/h											
28"		6X11151	380/85R28 133A8/133B TL	386	1378	627	4124	W13	82	47	
											Load Capacity (kg/tyre)
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static	2650	3130	3550	3980	4360	4740				
	10 km/h	1730	2040	2320	2595	2840	3090				
	25 km/h	1280	1510	1715	1920	2100	2290				
	30 km/h	1230	1455	1650	1850	2030	2200				
	40 km/h	1150	1360	1545	1730	1895	2060				
	50 km/h	1150	1360	1545	1730	1895	2060				
	65 km/h										
	28"	6X11211	420/85R28 139A8/139B TL	439	1438	637	4298	W15L	102	48	
											Load Capacity (kg/tyre)
Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
Static		3130	3690	4190	4695	5140	5590				
10 km/h		2040	2405	2730	3060	3350	3645				
25 km/h		1510	1780	2020	2265	2480	2700				
30 km/h		1455	1715	1950	2180	2390	2600				
40 km/h		1360	1600	1820	2040	2235	2430				
50 km/h		1360	1600	1820	2040	2235	2430				
65 km/h											
30"		6X11161	380/85R30 135A8/135B TL	388	1407	639	4218	W13	88	46	
											Load Capacity (kg/tyre)
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static	2810	3310	3760	4210	4610	5010				
	10 km/h	1830	2160	2450	2750	3010	3270				
	25 km/h	1355	1600	1815	2030	2225	2420				
	30 km/h	1305	1540	1750	1960	2145	2330				
	40 km/h	1220	1440	1635	1830	2005	2180				
	50 km/h	1220	1440	1635	1830	2005	2180				
	65 km/h										

Farm Specialist TR-II 85 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)			
30"	6X11221	420/85R30 140A8/140B TL	439	1483	674	4440	W15L	107	48			
	Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static		3220	3795	4310	4830	5290	5750				
	10 km/h		2100	2475	2810	3150	3450	3750				
	25 km/h		1550	1830	2080	2330	2550	2775				
	30 km/h		1500	1765	2005	2250	2460	2675				
	40 km/h		1400	1650	1875	2100	2300	2500				
	50 km/h		1400	1650	1875	2100	2300	2500				
	65 km/h											
30"	6X11271	460/85R30 145A8/145B TL	466	1527	680	4566	W16L	125	50			
	Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static		3735	4400	5000	5600	6135	6670				
	10 km/h		2435	2870	3260	3650	4000	4350				
	25 km/h		1800	2125	2410	2700	2960	3220				
	30 km/h		1740	2050	2330	2610	2855	3100				
	40 km/h		1620	1910	2175	2435	2670	2900				
	50 km/h		1620	1910	2175	2435	2670	2900				
	65 km/h											
32"	6X11971	320/85R32 126A8/126B TL	311	1354	623	4063	W10	65	36			
	Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static							3910				
	10 km/h							2550				
	25 km/h							1870				
	30 km/h							1820				
	40 km/h							1700				
	50 km/h							1700				
	65 km/h											
34"	6X11171	380/85R34 137A8/137B TL	389	1487	681	4470	W12	101	46			
	Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static		2960	3490	3970	4440	4870	5290				
	10 km/h		1930	2280	2590	2900	3170	3450				
	25 km/h		1430	1685	1915	2145	2350	2550				
	30 km/h		1380	1620	1845	2070	2260	2460				
	40 km/h		1290	1520	1725	1930	2115	2300				
	50 km/h		1290	1520	1725	1930	2115	2300				
	65 km/h											
34"	6X11231	420/85R34 142A8/142B TL	439	1594	710	4784	W15L	120	48			
	Load Capacity (kg/tyre)											
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
	Static		3410	4020	4570	5120	5610	6095				
	10 km/h		2225	2620	2980	3340	3660	3975				
	25 km/h		1650	1940	2205	2470	2705	2940				
	30 km/h		1590	1870	2130	2380	2610	2835				
	40 km/h		1480	1750	1990	2225	2440	2650				
	50 km/h		1480	1750	1990	2225	2440	2650				
	65 km/h											

Farm Specialist TR-II 85 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
34"	6X11281	460/85R34 147A8/147B TL	470	1649	743	4944	W16L	143	50											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3960	4670	5300	5940	6510	7070				
										10 km/h	2580	3040	3460	3875	4240	4610				
										25 km/h	1910	2250	2560	2870	3140	3410				
										30 km/h	1840	2170	2470	2760	3030	3290				
										40 km/h	1720	2030	2305	2580	2830	3075				
										50 km/h	1720	2030	2305	2580	2830	3075				
										65 km/h										
										34"	6X11291	460/85R34 157A8/157B TL	470	1649	743	4944	W16L	159	50	
																				Load Capacity (kg/tyre)
Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8											3.2
Static	3960	4670	5300	5940	6510	7070	7115	7970	8440											9490
10 km/h	2580	3040	3460	3875	4240	4610	4640	5200	5510											6190
25 km/h	1910	2250	2560	2870	3140	3410	3430	3845	4075											4580
30 km/h	1840	2170	2470	2760	3030	3290	3310	3710	3930											4410
40 km/h	1720	2030	2305	2580	2830	3075	3090	3465	3670											4125
50 km/h	1720	2030	2305	2580	2830	3075	3090	3465	3670											4125
65 km/h																				
36"	6X11981	320/85R36 128A8/128B TL	313	1448	667	4368	W10	72	36											
																				Load Capacity (kg/tyre)
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						4140				
										10 km/h						2700				
										25 km/h						1980				
										30 km/h						1925				
										40 km/h						1800				
										50 km/h						1800				
										65 km/h										
										36"	6X11991	340/85R36 132A8/132B TL	357	1489	680	4489	W11	79	37	
																				Load Capacity (kg/tyre)
Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8											3.2
Static						4600														
10 km/h						3000														
25 km/h						2200														
30 km/h						2140														
40 km/h						2000														
50 km/h						2000														
65 km/h																				
38"	6X12001	340/85R38 133A8/133B TL	353	1540	711	4645	W11	81	37											
																				Load Capacity (kg/tyre)
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						4740				
										10 km/h						3090				
										25 km/h						2265				
										30 km/h						2200				
										40 km/h						2060				
										50 km/h						2060				
										65 km/h										

Farm Specialist TR-II 85 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
38"	6X11241	420/85R38 144A8/144B TL	439	1667	752	5014	W15L	127	48											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3605	4250	4830	5410	5925	6440				
										10 km/h	2350	2770	3150	3530	3860	4200				
										25 km/h	1740	2050	2330	2610	2860	3110				
										30 km/h	1680	1980	2250	2520	2755	2995				
										40 km/h	1570	1850	2100	2350	2575	2800				
										50 km/h	1570	1850	2100	2350	2575	2800				
										65 km/h										
38"	6X11301	460/85R38 149A8/149B TL	470	1737	776	5207	W16L	150	50											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4185	4930	5605	6280	6880	7475				
										10 km/h	2730	3220	3655	4095	4485	4875				
										25 km/h	2020	2380	2705	3030	3320	3610				
										30 km/h	1950	2295	2610	2920	3200	3480				
										40 km/h	1820	2145	2440	2730	2990	3250				
										50 km/h	1820	2145	2440	2730	2990	3250				
										65 km/h										
38"	6X11331	520/85R38 155A8/155B TL	530	1863	841	5589	W18L	190	51											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4990	5880	6680	7490	8200	8910				
										10 km/h	3255	3835	4360	4880	5350	5810				
										25 km/h	2410	2840	3225	3610	3960	4300				
										30 km/h	2320	2740	3110	3480	3815	4145				
										40 km/h	2170	2560	2905	3255	3565	3875				
										50 km/h	2170	2560	2905	3255	3565	3875				
										65 km/h										
38"	6X11371	650/85R38 173D/176A8 TL	666	2072	935	6192	DW20B	340	60											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	7185	8490	9635	10780	11760	12740	14530	16330		
										10 km/h	4685	5540	6280	7030	7670	8310	9480	10650		
										25 km/h	3470	4100	4650	5200	5670	6150	7010	7880		
										30 km/h	3340	3950	4480	5010	5470	5925	6760	7600		
										40 km/h	3120	3690	4190	4685	5110	5540	6320	7100		
										50 km/h	2980	3530	4000	4475	4885	5290	6040	6825		
										65 km/h	2840	3360	3810	4260	4650	5040	5750	6500		
42"	6X11311	460/85R42 151A8/151B TL	473	1865	844	5611	W16L	172	50											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4440	5240	5950	6665	7300	7935				
										10 km/h	2900	3415	3880	4350	4760	5175				
										25 km/h	2145	2530	2870	3220	3520	3830				
										30 km/h	2070	2435	2770	3100	3395	3690				
										40 km/h	1930	2280	2590	2900	3170	3450				
										50 km/h	1930	2280	2590	2900	3170	3450				
										65 km/h										

Farm Specialist TR-II 85 Series

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)			
42"	6X11341	520/85R42 157A8/157B TL	530	1958	875	5884	W18L	201	51			
		Load Capacity (kg/tyre)										
		Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
		Static	5310	6260	7115	7970	8730	9490				
		10 km/h	3465	4080	4640	5200	5690	6190				
		25 km/h	2560	3020	3430	3845	4210	4580				
		30 km/h	2470	2910	3310	3710	4060	4410				
		40 km/h	2310	2720	3090	3465	3795	4125				
		50 km/h	2310	2720	3090	3465	3795	4125				
		65 km/h										
		42"	6X11351	520/85R42 162A8/162B TL	530	1958	875	5884	W18L	213	51	
				Load Capacity (kg/tyre)								
Speed \ Pressure (bar)	0.6			0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
Static	5310			6260	7115	7970	8730	9490	9720	10925		
10 km/h	3465			4080	4640	5200	5690	6190	6340	7125		
25 km/h	2560			3020	3430	3845	4210	4580	4690	5270		
30 km/h	2470			2910	3310	3710	4060	4410	4520	5080		
40 km/h	2310			2720	3090	3465	3795	4125	4230	4750		
50 km/h	2310			2720	3090	3465	3795	4125	4230	4750		
65 km/h												
42"	6X11361			520/85R46 158A8/158B TL	535	2062	921	6205	W18L	220	51	
				Load Capacity (kg/tyre)								
		Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
		Static	5470	6450	7330	8210	8990	9775				
		10 km/h	3570	4210	4780	5355	5865	6375				
		25 km/h	2640	3110	3540	3960	4340	4720				
		30 km/h	2550	3000	3410	3820	4180	4550				
		40 km/h	2380	2805	3190	3570	3910	4250				
		50 km/h	2380	2805	3190	3570	3910	4250				
		65 km/h										

FARM SPECIALIST TR - II RC (ROW CROP)

Versatile Tractor & Sprayer Tire for Row Crop Application

Superior radial construction row crop tire for every kind of cultivation, harvesting and spraying operation. Minimum damage to crops even in narrow spaced plantations. Excellent self-cleaning and improved traction. Overlapping crown and unique lug design with deep tread depth for long tread life and durability.



Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
16"	6X11881	210/95R16 106A8/106B TL	215	795	368	2373	W7	23	32											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						1700	1945	2185		
										10 km/h						1110	1270	1425		
										25 km/h						815	930	1045		
										30 km/h						790	905	1020		
										40 km/h						740	845	950		
										50 km/h						740	845	950		
										65 km/h										
18"	6X11891	210/95R18 108A8/108B TL	215	849	393	2542	W7	25,5	32											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						1790	2050	2300		
										10 km/h						1170	1335	1500		
										25 km/h						860	980	1100		
										30 km/h						835	950	1070		
										40 km/h						780	890	1000		
										50 km/h						780	890	1000		
										65 km/h										
20"	6X11901	210/95R20 110A8/110B TL	215	895	413	2686	W7	27,5	32											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						1900	2170	2440		
										10 km/h						1240	1415	1590		
										25 km/h						910	1040	1165		
										30 km/h						885	1010	1130		
										40 km/h						830	940	1060		
										50 km/h						830	940	1060		
										65 km/h										
30"	6X11251	420/90R30 142A8/142B TL	434	1496	679	4478	DW13	109	48											
										Load Capacity (kg/tyre)										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3410	4020	4570	5120	5610	6095				
										10 km/h	2225	2620	2980	3340	3660	3975				
										25 km/h	1650	1940	2205	2470	2705	2940				
										30 km/h	1590	1870	2130	2380	2610	2835				
										40 km/h	1480	1750	1990	2225	2440	2650				
										50 km/h	1480	1750	1990	2225	2440	2650				
										65 km/h										

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)																								
30"	6X11261	420/90R30 147A8/147B TL	434	1496	679	4478	DW13	115	48	Load Capacity (kg/tyre)																							
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4										
										Static	3410	4020	4570	5120	5610	6095	6295	7070															
										10 km/h	2225	2620	2980	3340	3660	3975	4105	4610															
										25 km/h	1650	1940	2205	2470	2705	2940	3040	3410															
										30 km/h	1590	1870	2130	2380	2610	2835	2930	3290															
										40 km/h	1480	1750	1990	2225	2440	2650	2740	3075															
										50 km/h	1480	1750	1990	2225	2440	2650	2740	3075															
										65 km/h																							
										32"	6X12011	230/95R32 128D/131A8 TL	236	1240	585	3742	W7	45	33	Load Capacity (kg/tyre)													
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						2420	2740	3050	3360	3635	3910	4140	
																				10 km/h						1580	1785	1990	2190	2370	2550	2700	
																				25 km/h						1250	1410	1570	1730	1870	2015	2130	
30 km/h						1210	1370	1525	1680											1820	1955	2070											
40 km/h						1150	1300	1450	1600											1730	1860	1970											
50 km/h						1110	1250	1390	1535											1660	1785	1890											
65 km/h						1050	1190	1325	1460											1580	1700	1800											
32"	6X12071	270/95R32 134D/137A8 TL	284	1319	620	3975	W9	60	35											Load Capacity (kg/tyre)													
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						3020	3410	3800	4190	4535	4875		
																				10 km/h						1970	2225	2480	2735	2960	3180		
																				25 km/h						1560	1760	1960	2160	2335	2510		
										30 km/h						1510	1710	1900	2100	2270	2440												
										40 km/h						1440	1625	1810	1995	2160	2320												
										50 km/h						1380	1560	1735	1910	2070	2225												
										65 km/h						1310	1480	1650	1820	1970	2120												
										32"	6X12081	270/95R32 136D/139A8 TL	284	1319	620	3975	W9	60	35	Load Capacity (kg/tyre)													
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						3020	3410	3800	4190	4535	4875	5150	
																				10 km/h						1970	2225	2480	2735	2960	3180	3360	
																				25 km/h						1560	1760	1960	2160	2335	2510	2650	
30 km/h						1510	1710	1900	2100											2270	2440	2575											
40 km/h						1440	1625	1810	1995											2160	2320	2450											
50 km/h						1380	1560	1735	1910											2070	2225	2350											
65 km/h						1310	1480	1650	1820											1970	2120	2240											
36"	6X12021	230/95R36 128D/131A8 TL	229	1345	636	4078	W7	50	33											Load Capacity (kg/tyre)													
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						2570	2900	3230	3560	3850	4140		
																				10 km/h						1670	1890	2105	2320	2510	2700		
																				25 km/h						1320	1490	1660	1830	1980	2130		
										30 km/h						1280	1450	1615	1780	1925	2070												
										40 km/h						1220	1380	1540	1695	1830	1970												
										50 km/h						1170	1320	1470	1625	1760	1890												
										65 km/h						1115	1260	1400	1550	1670	1800												

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)																									
36"	6X12091	270/95R36 137D/140A8 TL	283	1422	663	4291	W9	66	35	Load Capacity (kg/tyre)																								
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4											
										Static						3280	3700	4125	4550	4920	5290													
										10 km/h						2140	2415	2690	2970	3210	3450													
										25 km/h						1690	1910	2125	2340	2535	2725													
										30 km/h						1640	1850	2060	2275	2460	2645													
										40 km/h						1560	1760	1960	2165	2340	2520													
										50 km/h						1500	1690	1880	2080	2245	2415													
										65 km/h						1425	1610	1790	1980	2140	2300													
										38"	6X12101	270/95R38 138D/141D TL	285	1474	691	4450	W9	68	35	Load Capacity (kg/tyre)														
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4	
																				Static						3365	3800	4230	4670	5050	5430			
																				10 km/h						2195	2480	2760	3040	3290	3540			
25 km/h						1730	1960	2180	2405											2600	2800													
30 km/h						1680	1900	2120	2330											2520	2710													
40 km/h						1600	1810	2015	2220											2400	2580													
50 km/h						1535	1735	1930	2130											2305	2480													
65 km/h						1460	1650	1840	2030											2195	2360													
38"	6X12111	270/95R38 140D/143A8 TL	285	1474	691	4450	W9	69	35											Load Capacity (kg/tyre)														
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4	
																				Static						3365	3800	4230	4670	5050	5430	5750		
																				10 km/h						2195	2480	2760	3040	3290	3540	3750		
										25 km/h						1730	1960	2180	2405	2600	2800	2960												
										30 km/h						1680	1900	2120	2330	2520	2710	2875												
										40 km/h						1600	1810	2015	2220	2400	2580	2740												
										50 km/h						1535	1735	1930	2130	2305	2480	2625												
										65 km/h						1460	1650	1840	2030	2195	2360	2500												
										40"	6X12031	230/95R40 135D/138A8 TL	228	1454	662	4395	W7	55	33	Load Capacity (kg/tyre)														
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4	
																				Static						2920	3300	3680	4055	4385	4715	5010		
																				10 km/h						1910	2150	2400	2645	2860	3075	3270		
25 km/h						1505	1700	1895	2090											2260	2430	2580												
30 km/h						1460	1650	1840	2030											2190	2360	2510												
40 km/h						1390	1570	1750	1930											2090	2245	2390												
50 km/h						1335	1510	1680	1850											2000	2150	2290												
65 km/h						1270	1435	1600	1760											1910	2050	2180												
42"	6X12041	230/95R42 133D/136A8 TL	228	1497	684	4527	W7	57	33											Load Capacity (kg/tyre)														
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4	
																				Static						2750	3130	3505	3840	4120	4450	4740		
																				10 km/h						1790	2040	2290	2500	2690	2905	3090		
										25 km/h						1415	1610	1805	1980	2120	2295	2440												
										30 km/h						1370	1560	1750	1920	2060	2230	2370												
										40 km/h						1310	1490	1670	1830	1960	2120	2255												
										50 km/h						1255	1430	1600	1750	1880	2030	2160												
										65 km/h						1195	1360	1520	1670	1790	1935	2060												

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)																								
42"	6X12121	270/95R42 140D/143A8 TL	283	1580	744	4774	W9	74	35	Load Capacity (kg/tyre)																							
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4										
										Static						3565	4025	4485	4945	5350	5750												
										10 km/h						2325	2625	2925	3225	3490	3750												
										25 km/h						1840	2070	2310	2550	2755	2960												
										30 km/h						1780	2010	2240	2470	2670	2875												
										40 km/h						1700	1915	2135	2350	2545	2740												
										50 km/h						1630	1840	2050	2260	2440	2625												
										65 km/h						1550	1750	1950	2150	2325	2500												
										42"	6X12211	320/80R42 141D/144A8 TL	315	1567	730	4771	W10	86	35	Load Capacity (kg/tyre)													
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						3910	4440	4975	5450	5920			
																				10 km/h						2550	2900	3245	3550	3860			
																				25 km/h						2010	2290	2560	2810	3050			
30 km/h						1950	2220	2490	2720											2960													
40 km/h						1860	2115	2370	2590											2820													
50 km/h						1780	2030	2270	2490											2700													
65 km/h						1700	1930	2160	2370											2575													
44"	6X12051	230/95R44 134D/137A8 TL	229	1547	735	4679	W7	60	33											Load Capacity (kg/tyre)													
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						2850	3220	3590	3955	4280	4600	4875	
																				10 km/h						1860	2100	2340	2580	2790	3000	3180	
																				25 km/h						1470	1660	1850	2040	2200	2370	2510	
										30 km/h						1425	1610	1790	1980	2140	2300	2440											
										40 km/h						1360	1530	1710	1880	2040	2190	2320											
										50 km/h						1300	1470	1640	1805	1950	2100	2225											
										65 km/h						1240	1400	1560	1720	1860	2000	2120											
										44"	6X12131	270/95R44 142D/145A8 TL	279	1627	768	4917	W9	77	35	Load Capacity (kg/tyre)													
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						3670	4145	4620	5090	5510	5920	6095	
																				10 km/h						2395	2700	3010	3320	3590	3860	3975	
																				25 km/h						1890	2135	2380	2620	2840	3050	3140	
30 km/h						1835	2070	2310	2550											2750	2960	3050											
40 km/h						1750	1970	2200	2425											2620	2820	2900											
50 km/h						1675	1890	2110	2325											2510	2700	2780											
65 km/h						1600	1800	2010	2215											2395	2575	2650											
46"	6X12141	270/95R46 143D/146A8 TL	282	1677	798	5066	W9	81	35											Load Capacity (kg/tyre)													
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						3670	4145	4620	5090	5510	5920	6270	
																				10 km/h						2395	2700	3010	3320	3590	3860	4090	
																				25 km/h						1890	2135	2380	2620	2840	3050	3230	
										30 km/h						1835	2070	2310	2550	2750	2960	3130											
										40 km/h						1750	1970	2200	2425	2620	2820	2980											
										50 km/h						1675	1890	2110	2325	2510	2700	2860											
										65 km/h						1600	1800	2010	2215	2395	2575	2725											

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)					
46"	6X12171	300/95R46 146D/149A8 TL	305	1732	815	5233	W9	87	37					
Load Capacity (kg/tyre)														
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
	Static						4280	4830	5380	5930	6420	6900		
	10 km/h						2790	3150	3510	3870	4185	4500		
	25 km/h						2200	2490	2770	3060	3305	3555		
	30 km/h						2140	2415	2690	2970	3210	3450		
	40 km/h						2040	2300	2560	2825	3055	3285		
	50 km/h						1950	2205	2460	2710	2930	3150		
	65 km/h						1860	2100	2340	2580	2790	3000		
46"	6X12181	300/95R46 148D/151A8 TL	305	1732	815	5233	W9	88	37					
Load Capacity (kg/tyre)														
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
	Static						4280	4830	5380	5930	6420	6900	7245	
	10 km/h						2790	3150	3510	3870	4185	4500	4725	
	25 km/h						2200	2490	2770	3060	3305	3555	3730	
	30 km/h						2140	2415	2690	2970	3210	3450	3620	
	40 km/h						2040	2300	2560	2825	3055	3285	3450	
	50 km/h						1950	2205	2460	2710	2930	3150	3310	
	65 km/h						1860	2100	2340	2580	2790	3000	3150	
46"	6X12221	320/90R46 148D/151A8 TL	315	1737	810	5248	W10	89	37					
Load Capacity (kg/tyre)														
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
	Static						4280	4830	5380	5930	6900	7245		
	10 km/h						2790	3150	3510	3870	4500	4725		
	25 km/h						2200	2490	2770	3060	3555	3730		
	30 km/h						2140	2415	2690	2970	3450	3620		
	40 km/h						2040	2300	2560	2825	3285	3450		
	50 km/h						1950	2205	2460	2710	3150	3310		
	65 km/h						1860	2100	2340	2580	3000	3150		
46"	6X12231	340/85R46 150D/153A8 TL	352	1770	835	5345	W11	124	41					
Load Capacity (kg/tyre)														
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
	Static						4780	5390	6010	6625	7165	7705		
	10 km/h						3115	3520	3920	4320	4670	5025		
	25 km/h						2460	2780	3095	3410	3690	3970		
	30 km/h						2390	2700	3005	3310	3580	3850		
	40 km/h						2270	2570	2860	3155	3410	3670		
	50 km/h						2180	2460	2740	3025	3270	3520		
	65 km/h						2080	2345	2610	2880	3115	3350		
46"	6X11181	380/90R46 149A8/149B TL	391	1868	868	5633	W12	150	47					
Load Capacity (kg/tyre)														
	Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
	Static	3290	3890	4410	4930	5380	5830	6650	7475					
	10 km/h	2145	2535	2875	3220	3510	3800	4340	4875					
	25 km/h	1590	1875	2130	2380	2600	2810	3210	3610					
	30 km/h	1530	1810	2050	2295	2500	2710	3095	3480					
	40 km/h	1430	1690	1920	2145	2340	2535	2890	3250					
	50 km/h	1430	1690	1920	2145	2340	2535	2890	3250					
	65 km/h													

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)																								
46"	6X11191	VF 380/90R46 173B/173D TL	395	1868	868	5633	W13	181	47																								
										Load Capacity (kg/tyre)																							
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4										
										Static	4635	5380	6280	6880	7625	8220	9420	10465	11360	12410	13155	14050	14950										
										10 km/h	3020	3510	4095	4485	4970	5360	6140	6825	7410	8090	8580	9165	9750										
										25 km/h	2240	2600	3030	3320	3680	3970	4545	5050	5480	5990	6350	6780	7215										
										30 km/h	2155	2500	2920	3200	3550	3825	4380	4870	5285	5770	6120	6540	6955										
										40 km/h	2075	2410	2810	3080	3410	3680	4220	4690	5090	5560	5890	6290	6695										
										50 km/h	2015	2340	2730	2990	3315	3575	4095	4550	4940	5395	5720	6110	6500										
										65 km/h	2015	2340	2730	2990	3315	3575	4095	4550	4940	5395	5720	6110	6500										
										48"	6X12061	230/95R48 136D/139A8 TL	230	1647	780	4984	W7	65	33														
																				Load Capacity (kg/tyre)													
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						3020	3410	3800	4190	4535	4875	5150	
																				10 km/h						1970	2225	2480	2735	2960	3180	3360	
25 km/h						1560	1760	1960	2160											2335	2510	2650											
30 km/h						1510	1710	1900	2100											2270	2440	2575											
40 km/h						1440	1625	1810	1995											2160	2320	2450											
50 km/h						1380	1560	1735	1910											2070	2225	2350											
65 km/h						1310	1480	1650	1820											1970	2120	2240											
48"	6X12151	270/95R48 142D/145A8 TL	286	1734	821	5243	W9	84	35																								
																				Load Capacity (kg/tyre)													
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						3780	4270	4750	5240	5670	6095		
																				10 km/h						2465	2780	3100	3420	3700	3975		
										25 km/h						1950	2200	2450	2700	2920	3140												
										30 km/h						1890	2130	2380	2620	2830	3050												
										40 km/h						1800	2030	2260	2495	2700	2900												
										50 km/h						1725	1950	2170	2390	2590	2780												
										65 km/h						1640	1855	2070	2280	2465	2650												
										48"	6X12161	270/95R48 144D/147A8 TL	286	1734	821	5243	W9	85	35														
																				Load Capacity (kg/tyre)													
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						3780	4270	4750	5240	5670	6095	6440	
																				10 km/h						2465	2780	3100	3420	3700	3975	4200	
25 km/h						1950	2200	2450	2700											2920	3140	3320											
30 km/h						1890	2130	2380	2620											2830	3050	3220											
40 km/h						1800	2030	2260	2495											2700	2900	3065											
50 km/h						1725	1950	2170	2390											2590	2780	2940											
65 km/h						1640	1855	2070	2280											2465	2650	2800											
48"	6X12241	340/85R48 152D/155A8 TL	339	1803	850	5463	W11	109	37																								
																				Load Capacity (kg/tyre)													
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						4920	5555	6190	6820	7380	7935	8165	
																				10 km/h						3210	3620	4040	4450	4810	5175	5325	
										25 km/h						2535	2860	3190	3515	3800	4090	4210											
										30 km/h						2460	2780	3095	3410	3690	3970	4080											
										40 km/h						2340	2640	2950	3250	3510	3780	3890											
										50 km/h						2245	2535	2825	3115	3370	3620	3730											
										65 km/h						2140	2415	2690	2970	3210	3450	3550											

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)														
50"	6X11811	320/90R50 150A8/150B TL	305	1828	854	5527	W10	105	36														
										Load Capacity (kg/tyre)													
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
										Static	2680	3190	3620	4060	4420	4780	5430	6470	7090	7245	7705		
										10 km/h	1750	2080	2360	2645	2880	3120	3540	4220	4620	4725	5025		
										25 km/h	1290	1540	1750	1960	2130	2310	2620	3120	3420	3500	3720		
										30 km/h	1250	1480	1685	1890	2055	2225	2530	3010	3300	3370	3585		
										40 km/h	1165	1385	1575	1760	1920	2080	2360	2810	3080	3150	3350		
										50 km/h	1165	1385	1575	1760	1920	2080	2360	2810	3080	3150	3350		
										65 km/h													
52"	6X12191	300/95R52 149D/152A8 TL	305	1889	895	5712	W9	99	37														
										Load Capacity (kg/tyre)													
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
										Static						4635	5230	5830	6430	6950	7475		
										10 km/h						3020	3410	3800	4190	4530	4875		
										25 km/h						2390	2695	3000	3310	3580	3850		
										30 km/h						2320	2615	2915	3210	3475	3740		
										40 km/h						2205	2490	2775	3060	3310	3560		
										50 km/h						2115	2390	2660	2935	3170	3410		
										65 km/h						2015	2275	2535	2795	3020	3250		
52"	6X12201	300/95R52 151D/154A8 TL	305	1889	895	5712	W9	100	37														
										Load Capacity (kg/tyre)													
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
										Static						4635	5230	5830	6430	6950	7475	7935	
										10 km/h						3020	3410	3800	4190	4530	4875	5175	
										25 km/h						2390	2695	3000	3310	3580	3850	4090	
										30 km/h						2320	2615	2915	3210	3475	3740	3970	
										40 km/h						2205	2490	2775	3060	3310	3560	3780	
										50 km/h						2115	2390	2660	2935	3170	3410	3620	
										65 km/h						2015	2275	2535	2795	3020	3250	3450	

FARM SPECIALIST FLOTATION BIAS / BIAS LIGHT

Towed Vehicles & Large Implements

The Farm Specialist FB is a tubeless flotation tire made to protect your soil with low compaction. It provides a high load capacity at low inflation pressures, thus preventing damages to fields and crops. It offers enhanced durability due to the strong casing construction and compounds used.

The Farm Specialist FB Light is a tubeless flotation tire offering an alternate tread design and lower weight as compared to the FB. It provides a high load capacity at low inflation pressures, thus preventing damages to fields and crops.



Rim Ø	Item Number	Description	Star /PR	Section Width (mm)	Overall Dia- meter (mm)	Recom. Rim Width (inch)	LI/SI		Inflation Pressure	Max Load (kg)								Weight (kg)	Tread Depth (mm)
							Free Rolling	Drive Wheel		Free Rolling				Drive Wheel					
									10 (km/h)	25 (km/h)	40 (km/h)	50 (km/h)	10 (km/h)	25 (km/h)	40 (km/h)	50 (km/h)			
15.5"	6X10191	400/60-15.5 145A8 TL Farm Specialist FB	14	405	875	AG 13.00	145A8	132A8	3.6	4060	3450	2900	2610	2800	2380	2000	1800	35.5	16
22.5"	6X10221	500/60-22.5 163A8 TL Farm Specialist FB Light	16	476	1170	AG 16.00	163A8	151A8	3.2	6830	5800	4875	4390	4830	4110	3450	3110	86	20
	6X10251	550/60-22.5 166A8 TL Farm Specialist FB Light	16	550	1238	16 DC	167A8	154A8	2.8	7630	6490	5450	4910	5250	4460	3750	3380	94.5	20
	6X10271	560/45-22.5 160A8 TL Farm Specialist FB	16	543	1076	AG 16.00	160A8	148A8	3.2	6300	5360	4500	4050	4410	3750	3150	2840	79.5	25
	6X10291	600/50-22.5 165A8 TL Farm Specialist FB Light	16	576	1170	AG 20.00	165A8	153A8	2.6	7210	6130	5150	4640	5110	4340	3650	3290	97	20
	6X10311	600/55-22.5 169A8 TL Farm Specialist FB	16	600	1235	AG 20.00	169A8	156A8	2.6	8120	6900	5800	5220	5600	4760	4000	3600	108	20
	6X10331	700/40-22.5 168A8 TL Farm Specialist FB Light	18	676	1170	AG 24.00	168A8	156A8	3.4	7840	6660	5600	5040	5600	4750	4000	3600	116	20
	6X10351	700/50-22.5 174A8 TL Farm Specialist FB	16	700	1270	AG 24.00	174A8	162A8	2.8	9380	7970	6700	6030	6650	5650	4750	4280	124.5	20
26.5"	6X10361	600/55-26.5 170A8 TL Farm Specialist FB	16	591	1333	AG 20.00	170A8	159A8	2.6	8400	7140	6000	5400	6130	5210	4375	3940	130	25
	6X10381	700/50-26.5 174A8 TL Farm Specialist FB	16	700	1333	AG 24.00	174A8	162A8	2.4	9380	7970	6700	6030	6650	5650	4750	4280	148	25
	6X10391	800/45-26.5 177A8 TL Farm Specialist FB	16	800	1386	AG 28.00	177A8	164A8	2.2	10220	8690	7300	6570	7000	5950	5000	4500	156	25
30.5"	6X10421	750/60-30.5 182A8 TL Farm Specialist FB	16	750	1670	AG 24.00	182A8	170A8	2.2	11900	10120	8500	7650	8400	7140	6000	5400	221.5	25.4
	6X10411	850/50-30.5 186A8 TL Farm Specialist FB	16	850	1670	AG 28.00	186A8	174A8	2.2	13300	11310	9500	8550	9380	7970	6700	6030	241	25.4

FARM SPECIALIST FLOTATION RADIAL

Heavy Duty Flotation Applications

A flotation and transport tire mainly designed for field use including spreaders, trailers and implements. Wide profile results in an extended contact area to reduce soil compaction and increase crop yield. Product life also elongated by reinforced tread and flank protection.



FR-Trac

FR-G / FR-G Steel

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	-----------------------	---------------------------	----------------------------	------------------	------------------	------------------

Farm Specialist FR Trac

17"	6X10111	500/50R17 145D TL	497	925	412	2780	AG 16.00	52.5	15
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	2935	3270	3870	4400	4935	5400	5800	6270	6670
10 km/h	2300	2560	3030	3445	3860	4230	4540	4910	5220
25 km/h	2015	2245	2660	3020	3390	3710	3985	4310	4580
30 km/h	1930	2145	2540	2890	3240	3550	3810	4115	4380
40 km/h	1735	1930	2290	2600	2920	3195	3430	3710	3940
50 km/h	1540	1720	2035	2315	2600	2840	3050	3300	3510
60 km/h	1365	1520	1800	2050	2295	2510	2700	2920	3100
65 km/h	1275	1420	1680	1910	2145	2350	2520	2725	2900

Farm Specialist FR Trac


22.5"	6X10121	500/60R22.5 155D TL	483	1186	537	3558	AG 16.00	84.5	26
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	3920	4370	5170	5880	6595	7220	7750	8380	8910
10 km/h	3070	3420	4045	4600	5160	5650	6070	6560	6975
25 km/h	2690	3000	3550	4040	4530	4960	5330	5755	6120
30 km/h	2575	2870	3390	3860	4330	4740	5090	5500	5850
40 km/h	2320	2580	3060	3480	3900	4270	4585	4950	5270
50 km/h	2060	2300	2720	3095	3470	3800	4080	4410	4690
60 km/h	1820	2030	2405	2740	3070	3360	3610	3900	4145
65 km/h	1705	1900	2250	2560	2870	3140	3370	3640	3875

Farm Specialist FR-G


22.5"	6X09911	500/60R22.5 155D TL	506	1170	528	3509	AG 16.00	93	25
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	3920	4370	5170	5880	6595	7220	7750	8380	8910
10 km/h	3070	3420	4045	4600	5160	5650	6070	6560	6975
25 km/h	2690	3000	3550	4040	4530	4960	5330	5755	6120
30 km/h	2575	2870	3390	3860	4330	4740	5090	5500	5850
40 km/h	2320	2580	3060	3480	3900	4270	4585	4950	5270
50 km/h	2060	2300	2720	3095	3470	3800	4080	4410	4690
60 km/h	1820	2030	2405	2740	3070	3360	3610	3900	4145
65 km/h	1705	1900	2250	2560	2870	3140	3370	3640	3875

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	-----------------------	---------------------------	----------------------------	------------------	------------------	------------------


Farm Specialist FR Trac

	22.5"	6X10131	560/45R22.5 152D TL	523	1085	486	3266	AG 16.00	85	25	
	Load Capacity (kg/tyre)										
	Speed \ Pressure (bar)		1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
	Static		3590	4000	4735	5390	6040	6610	7100	7675	8165
	10 km/h		2810	3130	3705	4220	4730	5175	5560	6010	6390
	25 km/h		2470	2750	3250	3700	4150	4540	4880	5270	5610
	30 km/h		2360	2630	3110	3540	3970	4340	4660	5040	5360
	40 km/h		2120	2365	2800	3185	3570	3910	4200	4540	4830
	50 km/h		1890	2105	2490	2835	3180	3480	3740	4040	4295
	60 km/h		1670	1860	2200	2510	2810	3080	3305	3570	3800
65 km/h		1560	1740	2060	2340	2630	2875	3090	3340	3550	


Farm Specialist FR-G

	22.5"	6X09921	560/45R22.5 152D TL	538	1072	480	3220	AG 16.00	88.5	25	
	Load Capacity (kg/tyre)										
	Speed \ Pressure (bar)		1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
	Static		3590	4000	4735	5390	6040	6610	7100	7675	8165
	10 km/h		2810	3130	3705	4220	4730	5175	5560	6010	6390
	25 km/h		2470	2750	3250	3700	4150	4540	4880	5270	5610
	30 km/h		2360	2630	3110	3540	3970	4340	4660	5040	5360
	40 km/h		2120	2365	2800	3185	3570	3910	4200	4540	4830
	50 km/h		1890	2105	2490	2835	3180	3480	3740	4040	4295
	60 km/h		1670	1860	2200	2510	2810	3080	3305	3570	3800
65 km/h		1560	1740	2060	2340	2630	2875	3090	3340	3550	

Farm Specialist FR Trac

	22.5"	6X10141	560/60R22.5 161D TL	522	1277	570	3837	AG 16.00	89.5	20	
	Load Capacity (kg/tyre)										
	Speed \ Pressure (bar)		1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
	Static		4680	5210	6170	7020	7870	8615	9255	10000	10640
	10 km/h		3660	4080	4830	5495	6160	6740	7240	7825	8325
	25 km/h		3215	3580	4240	4820	5410	5920	6360	6870	7310
	30 km/h		3070	3420	4050	4610	5170	5660	6075	6565	6980
	40 km/h		2770	3080	3650	4150	4655	5095	5470	5910	6290
	50 km/h		2460	2740	3245	3690	4140	4530	4870	5260	5595
	60 km/h		2180	2425	2870	3265	3660	4010	4305	4650	4950
65 km/h		2035	2265	2680	3050	3420	3745	4020	4350	4625	

Farm Specialist FR-G

	22.5"	6X09931	560/60R22.5 161D TL	562	1256	559	3767	AG 16.00	109	25	
	Load Capacity (kg/tyre)										
	Speed \ Pressure (bar)		1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
	Static		4680	5210	6170	7020	7870	8615	9255	10000	10640
	10 km/h		3660	4080	4830	5495	6160	6740	7240	7825	8325
	25 km/h		3215	3580	4240	4820	5410	5920	6360	6870	7310
	30 km/h		3070	3420	4050	4610	5170	5660	6075	6565	6980
	40 km/h		2770	3080	3650	4150	4655	5095	5470	5910	6290
	50 km/h		2460	2740	3245	3690	4140	4530	4870	5260	5595
	60 km/h		2180	2425	2870	3265	3660	4010	4305	4650	4950
65 km/h		2035	2265	2680	3050	3420	3745	4020	4350	4625	

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	-----------------------	---------------------------	----------------------------	------------------	------------------	------------------

Farm Specialist FR-G Steel

22.5"	6X09941	560/60R22.5 164D TL	562	1256	559	3767	AG 16.00	113	25
-------	---------	---------------------	-----	------	-----	------	----------	-----	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.5	1.6	2	2.4	2.8	3.2	3.6	4
Static	5060	5635	6440	6670	7590	8510	9315	10005	10810	11500
10 km/h	3960	4410	5040	5220	5940	6660	7290	7830	8460	9000
25 km/h	3475	3870	4420	4580	5210	5845	6400	6870	7425	7900
30 km/h	3320	3700	4230	4380	4980	5590	6115	6570	7100	7550
40 km/h	2990	3330	3810	3940	4490	5030	5510	5915	6390	6800
50 km/h	2660	2965	3390	3510	3990	4480	4900	5260	5690	6050
60 km/h	2350	2620	2995	3100	3530	3960	4330	4655	5030	5350
65 km/h	2200	2450	2800	2900	3300	3700	4050	4350	4700	5000

Farm Specialist FR Trac

22.5"	6X10151	600/50R22.5 159D TL	580	1185	536	3556	AG 20.00	103.5	26
-------	---------	---------------------	-----	------	-----	------	----------	-------	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.5	1.6	2	2.4	2.8	3.2	3.6	4
Static	4430	4930	5485	5835	6640	7445	8150	8750	9460	10060
10 km/h	3465	3860	4290	4570	5200	5830	6380	6850	7400	7875
25 km/h	3040	3390	3770	4010	4560	5115	5600	6010	6500	6910
30 km/h	2910	3240	3600	3830	4360	4890	5350	5750	6210	6605
40 km/h	2620	2915	3240	3450	3930	4400	4820	5180	5590	5950
50 km/h	2330	2590	2885	3070	3490	3920	4290	4605	4975	5290
60 km/h	2060	2290	2550	2715	3090	3460	3790	4070	4400	4680
65 km/h	1925	2140	2385	2540	2890	3240	3540	3805	4110	4375

Farm Specialist FR-G

22.5"	6X09951	600/50R22.5 159D TL	608	1168	522	3507	AG 20.00	104	25
-------	---------	---------------------	-----	------	-----	------	----------	-----	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.5	1.6	2	2.4	2.8	3.2	3.6	4
Static	4430	4930	5635	5835	6640	7445	8150	8750	9460	10060
10 km/h	3465	3860	4410	4570	5200	5830	6380	6850	7400	7875
25 km/h	3040	3390	3870	4010	4560	5115	5600	6010	6500	6910
30 km/h	2910	3240	3700	3830	4360	4890	5350	5750	6210	6605
40 km/h	2620	2915	3330	3450	3930	4400	4820	5180	5590	5950
50 km/h	2330	2590	2965	3070	3490	3920	4290	4605	4975	5290
60 km/h	2060	2290	2620	2715	3090	3460	3790	4070	4400	4680
65 km/h	1925	2140	2450	2540	2890	3240	3540	3805	4110	4375

Farm Specialist FR-G

22.5"	6X09961	600/55R22.5 162D TL	610	1214	537	3643	AG 20.00	121.5	25
-------	---------	---------------------	-----	------	-----	------	----------	-------	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	4810	5350	6340	7210	8085	8850	9505	10270	10925
10 km/h	3760	4190	4960	5640	6330	6925	7440	8040	8550
25 km/h	3300	3680	4350	4950	5550	6080	6530	7055	7505
30 km/h	3155	3515	4160	4730	5310	5810	6240	6740	7170
40 km/h	2840	3165	3750	4260	4780	5230	5620	6070	6460
50 km/h	2530	2815	3330	3790	4250	4655	5000	5400	5750
60 km/h	2235	2490	2950	3350	3760	4120	4420	4780	5080
65 km/h	2090	2330	2755	3135	3515	3850	4130	4465	4750

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	-----------------------	---------------------------	----------------------------	------------------	------------------	------------------

Farm Specialist FR-G

22.5"	6X09971	650/50R22.5 163D TL	654	1208	532	3619	AG 20.00	127.5	25
-------	---------	---------------------	-----	------	-----	------	----------	-------	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	4
Static	4930	5490	6500	7400	8300	9080	9755	10540	11210	
10 km/h	3860	4300	5090	5790	6490	7110	7630	8250	8775	
25 km/h	3390	3770	4470	5080	5700	6240	6700	7240	7700	
30 km/h	3240	3610	4270	4860	5450	5960	6400	6920	7360	
40 km/h	2920	3250	3845	4375	4905	5370	5770	6230	6630	
50 km/h	2595	2890	3420	3890	4365	4780	5130	5545	5900	
60 km/h	2295	2555	3025	3440	3860	4225	4540	4900	5215	
65 km/h	2145	2390	2830	3220	3610	3950	4240	4580	4875	

Farm Specialist FR Trac

22.5"	6X10161	710/45R22.5 165D TL	678	1189	530	3567	AG 24.00	117.5	26
-------	---------	---------------------	-----	------	-----	------	----------	-------	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	5210	5800	6870	7820	8765	9590	10305	11130	11845
10 km/h	4080	4540	5380	6120	6860	7510	8065	8710	9270
25 km/h	3580	3990	4720	5370	6020	6590	7080	7650	8140
30 km/h	3420	3810	4510	5130	5755	6300	6765	7310	7780
40 km/h	3080	3430	4060	4620	5180	5670	6090	6580	7000
50 km/h	2740	3050	3610	4110	4610	5050	5420	5860	6230
60 km/h	2425	2700	3195	3640	4080	4460	4790	5180	5510
65 km/h	2265	2520	2990	3400	3810	4170	4480	4840	5150

Farm Specialist FR-G

22.5"	6X09981	710/45R22.5 165D TL	710	1189	530	3567	AG 24.00	137.5	25
-------	---------	---------------------	-----	------	-----	------	----------	-------	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	5210	5800	6870	7820	8765	9590	10305	11130	11845
10 km/h	4080	4540	5380	6120	6860	7510	8065	8710	9270
25 km/h	3580	3990	4720	5370	6020	6590	7080	7650	8140
30 km/h	3420	3810	4510	5130	5755	6300	6765	7310	7780
40 km/h	3080	3430	4060	4620	5180	5670	6090	6580	7000
50 km/h	2740	3050	3610	4110	4610	5050	5420	5860	6230
60 km/h	2425	2700	3195	3640	4080	4460	4790	5180	5510
65 km/h	2265	2520	2990	3400	3810	4170	4480	4840	5150

Farm Specialist FR trac

26.5"	6X10171	600/55R26.5 165D TL	587	1361	608	4046	AG 20.00	123	26
-------	---------	---------------------	-----	------	-----	------	----------	-----	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	5210	5800	6870	7820	8765	9590	10305	11130	11845
10 km/h	4080	4540	5380	6120	6860	7510	8065	8710	9270
25 km/h	3580	3990	4720	5370	6020	6590	7080	7650	8140
30 km/h	3420	3810	4510	5130	5755	6300	6765	7310	7780
40 km/h	3080	3430	4060	4620	5180	5670	6090	6580	7000
50 km/h	2740	3050	3610	4110	4610	5050	5420	5860	6230
60 km/h	2425	2700	3195	3640	4080	4460	4790	5180	5510
65 km/h	2265	2520	2990	3400	3810	4170	4480	4840	5150

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	-----------------------	---------------------------	----------------------------	------------------	------------------	------------------

Farm Specialist FR-G

26.5"	6X09991	600/55R26.5 165D TL	610	1320	586	3966	AG 20.00	135	25
-------	---------	---------------------	-----	------	-----	------	----------	-----	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	5210	5800	6870	7820	8765	9590	10305	11130	11845
10 km/h	4080	4540	5380	6120	6860	7510	8065	8710	9270
25 km/h	3580	3990	4720	5370	6020	6590	7080	7650	8140
30 km/h	3420	3810	4510	5130	5755	6300	6765	7310	7780
40 km/h	3080	3430	4060	4620	5180	5670	6090	6580	7000
50 km/h	2740	3050	3610	4110	4610	5050	5420	5860	6230
60 km/h	2425	2700	3195	3640	4080	4460	4790	5180	5510
65 km/h	2265	2520	2990	3400	3810	4170	4480	4840	5150

Farm Specialist FR-G

26.5"	6X10001	620/55R26.5 166D TL	641	1378	618	4142	AG 20.00	137.5	25
-------	---------	---------------------	-----	------	-----	------	----------	-------	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	5360	5970	7070	8045	9020	9870	10605	11460	12190
10 km/h	4200	4675	5530	6295	7060	7730	8300	8970	9540
25 km/h	3685	4100	4860	5530	6200	6780	7285	7870	8370
30 km/h	3520	3920	4640	5280	5920	6480	6960	7520	8000
40 km/h	3170	3530	4180	4760	5330	5840	6270	6775	7210
50 km/h	2820	3140	3720	4230	4745	5195	5580	6030	6410
60 km/h	2495	2780	3290	3740	4200	4590	4930	5330	5670
65 km/h	2330	2600	3070	3500	3920	4290	4610	4980	5300

Farm Specialist FR-G

26.5"	6X10011	650/55R26.5 169D TL	650	1396	625	4196	AG 20.00	151	25
-------	---------	---------------------	-----	------	-----	------	----------	-----	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	5870	6540	7740	8800	9870	10805	11605	12540	13340
10 km/h	4590	5115	6055	6890	7725	8455	9080	9810	10440
25 km/h	4030	4490	5315	6050	6780	7420	7970	8610	9160
30 km/h	3850	4290	5080	5780	6480	7090	7620	8230	8760
40 km/h	3470	3865	4575	5205	5840	6390	6860	7415	7890
50 km/h	3090	3440	4070	4630	5190	5685	6105	6600	7020
60 km/h	2730	3040	3600	4095	4590	5030	5400	5830	6205
65 km/h	2550	2840	3360	3830	4290	4700	5045	5450	5800

Farm Specialist FR-G Steel

26.5"	6X10021	650/55R26.5 178D TL	650	1396	625	4196	AG 20.00	182	25
-------	---------	---------------------	-----	------	-----	------	----------	-----	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	5
Static	6730	7420	8800	10005	11210	12250	13280	14145	15010	17250
10 km/h	5265	5805	6885	7830	8775	9585	10395	11070	11745	13500
25 km/h	4620	5095	6040	6870	7700	8410	9125	9720	10310	11850
30 km/h	4420	4870	5775	6570	7360	8040	8720	9290	9850	11325
40 km/h	3980	4385	5200	5915	6630	7240	7850	8360	8870	10200
50 km/h	3540	3900	4630	5260	5900	6440	6990	7440	7895	9075
60 km/h	3130	3450	4090	4655	5215	5700	6180	6580	6980	8025
65 km/h	2925	3225	3825	4350	4875	5325	5775	6150	6525	7500

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	-----------------------	---------------------------	----------------------------	------------------	------------------	------------------

Farm Specialist FR Trac

26.5"	6X10181	710/50R26.5 170D TL	678	1342	596	4034	AG 24.00	142.5	26
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	6070	6760	8000	9110	10210	11180	12005	12970	13800
10 km/h	4750	5290	6260	7130	7990	8750	9395	10150	10800
25 km/h	4170	4645	5500	6260	7015	7680	8250	8910	9480
30 km/h	3985	4440	5255	5980	6700	7340	7880	8515	9060
40 km/h	3590	4000	4730	5385	6040	6610	7100	7670	8160
50 km/h	3190	3560	4210	4790	5370	5880	6315	6820	7260
60 km/h	2825	3145	3720	4240	4750	5200	5585	6035	6420
65 km/h	2640	2940	3480	3960	4440	4860	5220	5640	6000



Farm Specialist FR-G Steel

26.5"	6X10031	710/50R26.5 170D TL	728	1368	613	4113	AG 24.00	176.5	25
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	6070	6760	8000	9110	10210	11180	12005	12970	13800
10 km/h	4750	5290	6260	7130	7990	8750	9395	10150	10800
25 km/h	4170	4645	5500	6260	7015	7680	8250	8910	9480
30 km/h	3985	4440	5255	5980	6700	7340	7880	8515	9060
40 km/h	3590	4000	4730	5385	6040	6610	7100	7670	8160
50 km/h	3190	3560	4210	4790	5370	5880	6315	6820	7260
60 km/h	2825	3145	3720	4240	4750	5200	5585	6035	6420
65 km/h	2640	2940	3480	3960	4440	4860	5220	5640	6000



Farm Specialist FR-G

26.5"	6X10041	750/45R26.5 170D TL	751	1345	594	4044	AG 24.00	162.5	25
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	6070	6760	8000	9110	10210	11180	12005	12970	13800
10 km/h	4750	5290	6260	7130	7990	8750	9395	10150	10800
25 km/h	4170	4645	5500	6260	7015	7680	8250	8910	9480
30 km/h	3985	4440	5255	5980	6700	7340	7880	8515	9060
40 km/h	3590	4000	4730	5385	6040	6610	7100	7670	8160
50 km/h	3190	3560	4210	4790	5370	5880	6315	6820	7260
60 km/h	2825	3145	3720	4240	4750	5200	5585	6035	6420
65 km/h	2640	2940	3480	3960	4440	4860	5220	5640	6000



Farm Specialist FR-G Steel

30.5"	6X10061	600/60R30.5 173D TL	624	1487	673	4477	AG 20.00	188	25
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	6580	7325	8670	9870	11060	12110	13010	14050	14950
10 km/h	5150	5730	6785	7720	8660	9480	10180	11000	11700
25 km/h	4520	5030	5960	6780	7600	8320	8935	9650	10270
30 km/h	4320	4810	5690	6480	7260	7950	8540	9225	9815
40 km/h	3890	4330	5130	5830	6540	7160	7690	8310	8840
50 km/h	3460	3850	4560	5190	5820	6370	6840	7390	7865
60 km/h	3060	3410	4030	4590	5150	5630	6050	6540	6955
65 km/h	2860	3185	3770	4290	4810	5265	5655	6110	6500



Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	-----------------------	---------------------------	----------------------------	------------------	------------------	------------------

Farm Specialist FR-G Steel

30.5"	6X10071	600/60R30.5 179D TL	624	1487	673	4477	AG 20.00	202	25
-------	---------	---------------------	-----	------	-----	------	----------	-----	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	4.5	5
Static	6950	7665	9090	10340	11585	12655	13725	14620	15510	16755	17825
10 km/h	5440	6000	7115	8090	9070	9905	10740	11440	12140	13110	13950
25 km/h	4775	5265	6245	7100	7960	8690	9430	10040	10650	11510	12245
30 km/h	4560	5030	5970	6790	7610	8310	9010	9595	10180	11000	11700
40 km/h	4110	4530	5375	6110	6850	7480	8115	8640	9170	9910	10540
50 km/h	3660	4030	4780	5440	6095	6660	7220	7690	8160	8815	9380
60 km/h	3230	3565	4230	4810	5390	5890	6385	6800	7210	7795	8290
65 km/h	3020	3330	3950	4495	5040	5500	5970	6355	6740	7285	7750

Farm Specialist FR-G Steel

30.5"	6X10081	750/60R30.5 181D TL	767	1658	735	4986	AG 24.00	234	25
-------	---------	---------------------	-----	------	-----	------	----------	-----	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	8350	9300	11005	12520	14040	15370	16510	17840	18975
10 km/h	6530	7280	8610	9800	10990	12030	12920	13960	14850
25 km/h	5735	6390	7560	8600	9645	10560	11340	12250	13035
30 km/h	5480	6100	7225	8220	9220	10090	10840	11710	12460
40 km/h	4940	5500	6510	7405	8300	9090	9760	10550	11220
50 km/h	4390	4890	5790	6590	7390	8085	8685	9380	9980
60 km/h	3880	4325	5120	5825	6530	7150	7680	8300	8830
65 km/h	3630	4040	4785	5445	6105	6680	7180	7755	8250

Farm Specialist FR-G Steel

30.5"	6X10091	850/50R30.5 182D TL	882	1652	719	4925	AG 28.00	249	25
-------	---------	---------------------	-----	------	-----	------	----------	-----	----



Load Capacity (kg/tyre)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	8600	9580	11340	12900	14470	15835	17010	18380	19550
10 km/h	6730	7500	8870	10100	11320	12390	13310	14380	15300
25 km/h	5910	6580	7790	8860	9940	10880	11680	12620	13430
30 km/h	5650	6290	7440	8470	9500	10395	11165	12065	12835
40 km/h	5085	5660	6705	7630	8550	9360	10060	10865	11560
50 km/h	4525	5040	5965	6790	7610	8330	8950	9670	10285
60 km/h	4000	4460	5275	6000	6730	7370	7910	8550	9095
65 km/h	3740	4165	4930	5610	6290	6885	7395	7990	8500

FARM SPECIALIST FRMAX

Towed Vehicles & Large Implements

The Farm Specialist FRMAX is a steel belted radial flotation tire with excellent traction capability. Low ground compaction and low rolling resistance are the main advantages of this tread type.



Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	-----------------------	---------------------------	----------------------------	------------------	------------------	------------------

Farm Specialist FRMAX

22.5"	6X19201	500/45R22.5 146D TL	503	1022	468	3080	AG 16.00	78.5	18
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	3035	3380	4000	4550	5105	5590	6000	6485	6900
10 km/h	2375	2645	3130	3560	3995	4370	4700	5075	5400
25 km/h	2085	2320	2750	3130	3510	3840	4120	4455	4740
30 km/h	1990	2220	2630	2990	3350	3670	3940	4260	4530
40 km/h	1795	2000	2365	2690	3020	3305	3550	3835	4080
50 km/h	1600	1780	2105	2395	2685	2940	3160	3410	3630
60 km/h	1410	1570	1860	2120	2375	2600	2790	3020	3210
65 km/h	1320	1470	1740	1980	2220	2430	2610	2820	3000

Farm Specialist FRMAX ST

22.5"	6X19211	560/45R22.5 152D TL	535	1061	480	3190	AG 16.00	95	25
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	3590	4000	4735	5390	6040	6610	7100	7675	8165
10 km/h	2810	3130	3705	4220	4730	5175	5560	6010	6390
25 km/h	2470	2750	3250	3700	4150	4540	4880	5270	5610
30 km/h	2360	2630	3110	3540	3970	4340	4660	5040	5360
40 km/h	2120	2365	2800	3185	3570	3910	4200	4540	4830
50 km/h	1890	2105	2490	2835	3180	3480	3740	4040	4295
60 km/h	1670	1860	2200	2510	2810	3080	3305	3570	3800
65 km/h	1560	1740	2060	2340	2630	2875	3090	3340	3550

Farm Specialist FRMAX ST

22.5"	6X19221	560/60R22.5 165D TL	541	1223	548	3669	AG 16.00	121	25	
Load Capacity (kg/tyre)										
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	5
Static	3887	4370	5428	6176	7130	7429	8832	9683	10638	11845
10 km/h	3040	3415	4250	4830	5580	6330	6910	7580	8325	9270
25 km/h	2670	3000	3730	4240	490	5560	6070	6655	7310	8140
30 km/h	2552	2869	3564	4055	4681	4878	5799	6358	6984	7777
40 km/h	2300	3210	3210	3650	4215	4785	5225	5725	6290	7005
50 km/h	2050	2300	2860	3250	3755	4260	4650	5100	5600	6235
60 km/h	1809	2033	2526	2873	3317	3457	4109	4505	4949	5511
65 km/h	1690	1900	2360	2685	3100	3230	3840	4210	4625	5150

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	-----------------------	---------------------------	----------------------------	------------------	------------------	------------------

Farm Specialist FRMAX

22.5"	6X19241	710/40R22.5 161D TL	709	1128	500	3388	AG 24.00	129	25
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	4680	5210	6170	7020	7870	8615	9255	10000	10640
10 km/h	3660	4080	4830	5495	6160	6740	7240	7825	8325
25 km/h	3215	3580	4240	4820	5410	5920	6360	6870	7310
30 km/h	3070	3420	4050	4610	5170	5660	6075	6565	6980
40 km/h	2770	3080	3650	4150	4655	5095	5470	5910	6290
50 km/h	2460	2740	3245	3690	4140	4530	4870	5260	5595
60 km/h	2180	2425	2870	3265	3660	4010	4305	4650	4950
65 km/h	2035	2265	2680	3050	3420	3745	4020	4350	4625

Farm Specialist FRMAX ST

22.5"	6X19251	710/45R22.5 165D TL	535	1061	480	3190	AG 16.00	95	25
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	5210	5800	6870	7820	8765	9590	10305	11130	11845
10 km/h	4080	4540	5380	6120	6860	7510	8065	8710	9270
25 km/h	3580	3990	4720	5370	6020	6590	7080	7650	8140
30 km/h	3420	3810	4510	5130	5755	6300	6765	7310	7780
40 km/h	3080	3430	4060	4620	5180	5670	6090	6580	7000
50 km/h	2740	3050	3610	4110	4610	5050	5420	5860	6230
60 km/h	2425	2700	3195	3640	4080	4460	4790	5180	5510
65 km/h	2265	2520	2990	3400	3810	4170	4480	4840	5150

Farm Specialist FRMAX ST

26.5"	6X19231	600/55R26.5 165D TL	605	1317	600	3947	AG 20.00	137	25	
Load Capacity (kg/tyre)										
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	5
Static	5210	5800	6870	7820	8765	9590	10305	11130	11845	11845
10 km/h	4080	4540	5380	6120	6860	7510	8065	8710	9270	9270
25 km/h	3580	3990	4720	5370	6020	6590	7080	7650	8140	8140
30 km/h	3420	3810	4510	5130	5755	6300	6765	7310	7780	7777
40 km/h	3080	3430	4060	4620	5180	5670	6090	6580	7000	7005
50 km/h	2740	3050	3610	4110	4610	5050	5420	5860	6230	6235
60 km/h	2425	2700	3195	3640	4080	4460	4790	5180	5510	5511
65 km/h	2265	2520	2990	3400	3810	4170	4480	4840	5150	5150

Farm Specialist FRMAX ST

26.5"	6X23211	650/55R26.5 169D TL	648	1376	650	4082	AG 20.00	163	25
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static			7800	8880	9890	10810	11710	12560	13340
10 km/h			6100	6950	7740	8460	9160	9830	10440
25 km/h			5590	6370	7100	7760	8400	9010	9570
30 km/h			5090	5790	6450	7050	7640	8190	8760
40 km/h			4610	5250	5850	6390	6920	7425	7890
50 km/h			4100	4670	5200	5690	6160	6610	7020
65 km/h			3390	3860	4300	4700	5090	5460	5800

Rim Ø	Item Number	Description	Section Width (mm)	Outside Diameter (mm)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	-----------------------	---------------------------	----------------------------	------------------	------------------	------------------

Farm Specialist FRMAX

22.5"	6X23221	710/50R26.5 170D TL	688	1356	614	4105	AG 24.00	175.5	25
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static			8050	9200	10240	11180	12120	12970	13800
10 km/h			6300	7200	8010	8750	9490	10150	10800
25 km/h			5530	6320	7030	7680	8230	8910	9480
30 km/h			5250	6000	6680	7290	7905	8460	9060
40 km/h			4760	5440	6050	6610	7170	7670	8160
50 km/h			4235	4840	5380	5880	6380	6820	7260
65 km/h			3500	4000	4450	4860	5270	5640	6000

Farm Specialist FRMAX ST

22.5"	6X19261	750/60R30.5 161D TL	770	1660	738	4992	AG 24.00	239	25
Load Capacity (kg/tyre)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	8350	9300	11005	12520	14040	15370	16510	17840	18975
10 km/h	6530	7280	8610	9800	10990	12030	12920	13960	14850
25 km/h	5735	6390	7560	8600	9645	10560	11340	12250	13035
30 km/h	5480	6100	7225	8220	9220	10090	10840	11710	12460
40 km/h	4940	5500	6510	7405	8300	9090	9760	10550	11220
50 km/h	4390	4890	5790	6590	7390	8085	8685	9380	9980
60 km/h	3880	4325	5120	5825	6530	7150	7680	8300	8830
65 km/h	3630	4040	4785	5445	6105	6680	7180	7755	8250

FSE-AW

Trailer, Implement & Transport Application

Up to date implement tire with high load capacity and minimum soil compaction character. Can be used for road and off-road applications.



Item Number	Size	PR	LI/SI	TL/TT	Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflation Pressure (bar)	Tread Depth (mm)	Weight (kg)	CoO	EAN
6X18013	10.0/80-12	8	122A6/119A8	TL	9 - 7	710	264	1500	3.7		12.5	IND	5999110836119
6X18443	10.0/75-15.3	12	132A6/128A8	TL	9	760	264	2000	5.6	10	14.8	IND	5999110837055
6X18023	10.0/75-15.3	14	136A6/132A8	TL	9	760	264	2240	6.6	10	15	IND	5999110836126
6X18033	10.0/75-15.3	22	148A6/144A8	TL	9	760	264	3150	8.5	10	20.4	IND	5999110836546
6X18043	11.5/80-15.3	14	145A6/141A8	TL	9	845	290	2900	5.7	12	19.1	IND	5999110837611
6X18433	12.5/80-15.3	14	142A6/138A8	TL	9	889	307	3150	5.2	11.5	24	IND	5999110837062
6X18063	400/60-15.5	14	151A6/148A8	TL	AG13	874	404	3450	4.4	20	33	IND	5999110836164
6X18053	10.5/65-16	10	129A6/125A8	TL	W 9 - W 8 L W 8	755	274	1850	6.4	10	15.4	IND	5999110837635
6X19933	13.0/75-16	10	142A6/138A8	TL	W9.W11	900	336	2650	3.6	10	25.0	IND	5999110838618
6X18093	500/50-17	14	155A6/151A8	TL	16	965	495	3975	3.4	12	50.8	IND	5999110837642
6X18103	500/50-17	18	160A6/156A8	TL	16	965	495	4500	5.0	12	52.5	IND	5999110838700
6X19913	13.0/65-18	14	147A6/143A8	TL	11	890	336	3075	5.2	10	32	IND	5999110838595
6X19923	13.0/65-18	16	150A6/146A8	TL	11	890	336	3350	5.9	10	34	IND	5999110838601
6X20003	16.0/70-20	14	147F	TT	13	1075	418	3075	3.5	25	66	IND	5999110838731

FSE FLOTATION IMP

Trailer, Implement & Transport Application

Modern implement tire with dual bead and reinforced sidewall for extra load carrying capacity. Provide excellent high flotation and trailers application.



Item Number	Size	PR	LI/SI	TL/TT	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Inflation Pressure (bar)	Tread Depth (mm)	Weight (Kg)	CoO	EAN
6X18113	400/60-15.5	14	151A6/148A8	TL	16	960	490	3450	4.4	20	35.3	IND	5999110833347
6X19803	400/60-15.5	16	153A6/149A8	TL	16	960	490	3650	5.2	20	36.0	IND	5999110834993
6X18123	500/50-17	14	155A6/151A8	TL	16	965	495	3875	3.4	19.5	51	IND	5999110837840

FSE TF, FSE TF DRP

Tractor Front Tires

2WD tractor front tires, good on road application and field application with excellent steering control ability.



Type	Product Code	Size	Star /PR	LI/SI	TL/TT	Rim Width (inch)	Mounted Diameter (mm)	Section Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread Depth (mm)	Weight (kg)	CoO	EAN
TF	6X18593	6.00-16	8	94A6/86A8	TT	4.5E	735	165	670		4.5	17	10.4	IND	5999110837406
TF	6X18603	6.50-16	8	98A6/90A8	TT	4.5E	760	175	750		4.2	20	14.5	IND	5999110837413
TF	6X18613	7.50-16	8	103A6/96A8	TT	5.5 F	805	205	875		3.7	20	17	IND	5999110837420
TF	6X18623	6.50-20	8	102A6/95A8	TT	5.00F	864	180	850		4.5	20	17.5	IND	5999110837437
TF	6X23043	7.50-20	8	109A6/101A8	TT	5.00F	915	205	1030		3.4	21	20.0	IND	5999110840338

FSE TF F2 RIB

Tractor Front Tire

2WD tractor front tires with good steering ability. Tire is built with resistant carcass.



Product Code	Size	Star /PR	LI/SI	TL/TT	Rim Width (inch)	Mounted Diameter (mm)	Section Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread Depth (mm)	Weight (kg)	CoO	EAN
6X19873	4.50-16	4	73A6/65A8	TT	3.00D	655	122	365		3.1	11	5.5	IND	5999110837406
6X19883	4.50-16	8	78A6/70A8	TT	3.00D	655	122	425		4.0	11	6	IND	5999110837413

FSE TF F3 RIB

Tractor Front Tire

2WD tractor front tires with strong casing for load capacity and cut resistant compound.



Product Code	Size	Star /PR	LI/SI	TL/TT	Rim Width (inch)	Mounted Diameter (mm)	Section Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread Depth (mm)	Weight (kg)	CoO	EAN
6X19863	6.00-19	8	93A6/85A8	TT	4.5E	814	165	650		3.3	19	11	IND	5999110837406

MULTI TRAC C/S R3

Wagons, Balers, Spreaders, Seeders & Feed Yard Mixers

With its squared lugs and wide base for stability, the Multi Trac C/S R-3 is excellent for minimal ground disturbance for turf and mowing applications. Made in the USA.



Item Number	Size	Star /PR	TL/TT	LI/SI (HLV)	Load Capacity (kg)	Speed (km/h)	Inflation Pressure (bar)	Rec. Rim (inch)	O.D. (mm)	S.W. (mm)	SLR (mm)	RC (mm)	Weight (kg)	Tread Depth (mm)	CoO	EAN
6E0580	375/70-15	4	TL	123A4	1550	20	1.4	10	902	373	398	2652	26.7	11.1	US	5999110800257
570083	41x14.00B20 (360/75B20)	4	TL	120B	1400	50	1.8	11	1067	375	483	3226	46.9	17.5	US	5999110802428
6A0375	44x18-20	6	TL	131B	1950	50	2.1	14	1156	470	526	3419	61.7	19.8	US	5999110802435

TURF PRO R-3

General Turf, Maintenance & Mowing Application

Flotation tread designed for mowing and turf applications, the Turf Pro R-3 series is engineered with shallow non-skid depth with isolated tread elements that create minimal ground disturbance for a turf-friendly result. Made in the USA.



Item Number	Size	Star /PR	TL/TT	LI/SI (HLV)	Load Capacity (kg)	Speed (km/h)	Inflation Pressure (bar)	Rec. Rim (inch)	O.D. (mm)	S.W. (mm)	SLR (mm)	RC (mm)	Weight (kg)	Tread Depth (mm)	CoO	EAN
5E0589	360/55-15	8	TL	116B	1250	50	3.1	13	770	361	348	2296	26.5	12.7	US	5999110800530
5E0080	400/70-16	4	TL	96A8	710	40	0.95	12	978	398	441	2936	37.1	19.1	US	5999110800547
570084	9.5-24 (240/85-24)	6	TL	102A8	850	40	2.1	8	1024	241	472	3061	26.2	12.7	US	5999110804262
5E0085	310/75-24	6	TL	105A8	950	40	1.8	10	1077	315	495	3302	37.2	15.9	US	5999110825106

MORE FROM THE CARLSTAR BRAND:

POWERSPORT



OUTDOOR POWER EQUIPMENT



CONSTRUCTION / INDUSTRIAL



TRAILERS AND TOWABLES



CARLISLE

branded tires are now

CARLSTAR™



TITAN

Titan Distribution Europe Kft.
H-2071 Páty, Szent József út 4.

www.carlstartires.eu

CARLISLE®

branded tires are now

CARLSTAR™



The content and information in the Catalogue is provided as information to the interested persons and may be used for informational purposes only. Information on products may pertain to limited geographic areas and markets. A reference to a product in the Catalogue does not imply that such product is, remains or will be available in the reader's location. None of the content and information in the Catalogue may be deemed to constitute an offer by Titan Distribution Europe Kft. Titan Distribution Europe Kft makes every effort to maintain the accuracy and quality of the information provided in the Catalogue. However, Titan Distribution Europe Kft. cannot guarantee and assumes no legal liability or responsibility for the accuracy or completeness of the information provided in the Catalogue. Titan Distribution Europe Kft. assumes no legal liability or responsibility for printing errors. It is the reader who assumes the risk that the information in the Catalogue may be incomplete, inaccurate, out of date or it may not meet the reader's needs and requirements.

www.carlstartires.eu